

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".


EE-SPZ301/401/W-01/W-02/Y-01

Fiber-Optic Sensing Head Fits Space-Confined Areas

- Light modulation effectively reduces external light interference
- Built-in amplifier with optical fiber
- Easy adjustment and optical axis monitoring with a Light-ON indicator
- Wide operating voltage range (5 to 24 VDC) makes smooth connection possible with a TTLs, relays, and programmable controllers (PLCs)
- Easy-to-wire connector assures ease of maintenance
- Convert to PNP output with EE-2001 conversion connector



Ordering Information

Appearance	Sensing method	Sensing distance	Output configuration	Weight	Part number
	Transmissive (with lens)	30 mm	Dark-ON	Approx. 7.6 g	EE-SPZ301W-01
			Light-ON		EE-SPZ401W-01
	Transmissive (without lens)	5 mm	Dark-ON	Approx. 7.0 g	EE-SPZ301W-02
			Light-ON		EE-SPZ401W-02
	Reflective (with lens)	1 to 3 mm	Dark-ON	Approx. 7.2 g	EE-SPZ301Y-01
			Light-ON		EE-SPZ401Y-01


Specifications

RATINGS

Item		Transmissive (with lens)		Transmissive (without lens)		Reflective (with lens)	
		EE-SPZ301 W-01	EE-SPZ401 W-01	EE-SPZ301 W-02	EE-SPZ401 W-02	EE-SPZ301 Y-01	EE-SPZ401 Y-01
Supply voltage		5 to 24 VDC $\pm 10\%$, ripple (p-p): 5% max.					
Current consumption		Average: 15 mA max.; Peak: 50 mA max.					
Sensing distance		30 mm		5 mm		1 to 3 mm (reflection factor: 90%; white paper 15 x 15 mm)	
Standard reference object		Opaque: 4 dia. min.		Opaque: 1 dia. min.		Transparent, opaque	
Differential distance		—		—		—	
Control output		At 5 to 24 VDC: 80-mA load current (I_C) with a residual voltage of 1.0 V max. When driving TTL: 10-mA load current (I_C) with a residual voltage of 0.4 V max.					
Output configuration	Transistor on output stage without detecting object	OFF	ON	OFF	ON	ON	OFF
	Transistor on output stage with detecting object	ON	OFF	ON	OFF	OFF	ON
Indicator*	Without detecting object	ON		ON		ON	
	With detecting object	OFF		OFF		OFF	
Response frequency**		100 Hz					
Connecting method		Dedicated connector (no soldering possible), EE-1002, EE-1003 (with/1-m cable attached)					
Light source		GaAs infrared LED (pulse modulated) with a peak wavelength of 940 nm					
Receiver		Si photo-diode with (pulse modulated) a sensing wavelength of 850 nm max.					

*The indicator is a GaP red LED (peak emission wavelength: 690 nm).

**The response frequency was measured by detecting the following disks rotating:

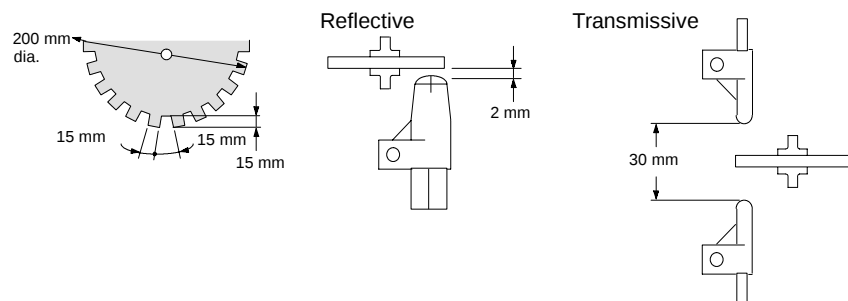


CHARACTERISTICS

Ambient illumination		Incandescent/fluorescent light: 3,000 lx max.
Ambient temperature	Operating	-10°C to 55°C (14°F to 131°F)
	Storage	-25°C to 65°C (-13°F to 149°F)
Ambient humidity	Operating	35% to 85%
	Storage	35% to 95%
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hrs each in X, Y, and Z directions
Shock resistance		Destruction: 500 m/s ² (approx. 50G's) for 3 times each in X, Y, and Z directions
Cable length		5 m max. (AWG24 min.)


Engineering Data

RECEIVER OUTPUT VS. SENSING DISTANCE (TYPICAL)


EE-SPZ301W-01, EE-SPZ401W-01

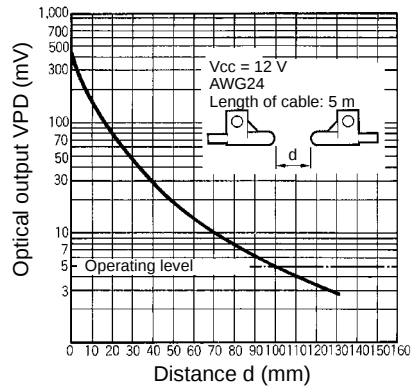

EE-SPZ301W-02, EE-SPZ401W-02

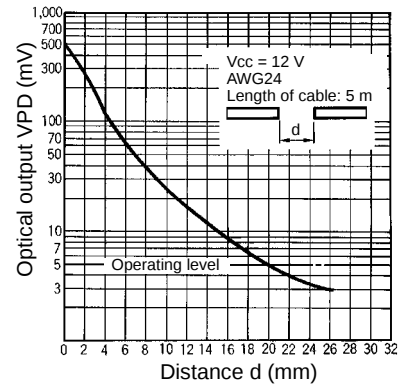


EE-SPZ301Y-01, EE-SPZ401Y-01

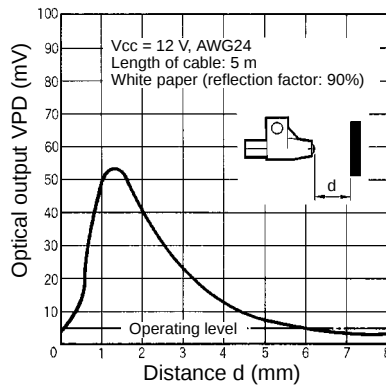


SENSING ANGLE VS. SENSING DISTANCE (TYPICAL)

EE-SPZ301Y-01, EE-SPZ401Y-01

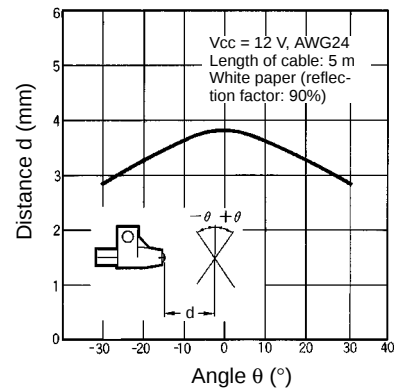


RECEIVER OUTPUT VS. BENDING RADIUS OF FIBER (TYPICAL)

EE-SPZ301Y-01, EE-SPZ401Y-01

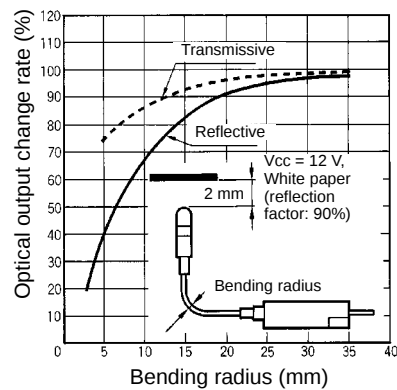


SENSING DISTANCE VS. OBJECT AREA (TYPICAL)

EE-SPZ301Y-01, EE-SPZ401Y-01

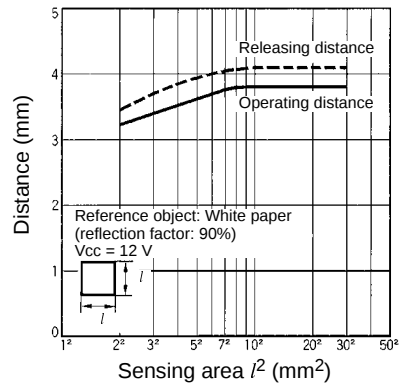


■ **OPERATING RANGE (TYPICAL)**

EE-SPZ301Y-01, EE-SPZ401Y-01

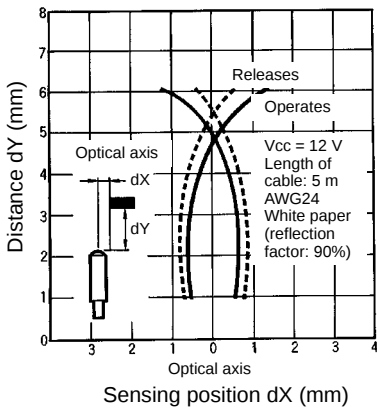


EE-SPZ301Y-01, EE-SPZ401Y-01

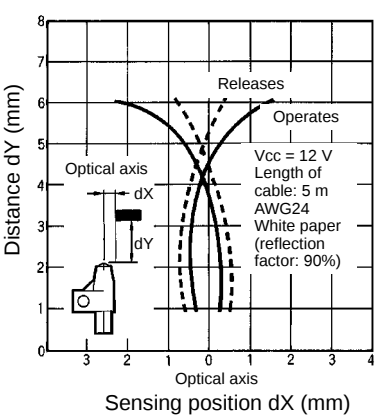

Operation


■ **INTERNAL/EXTERNAL CIRCUIT DIAGRAM**

Light-ON/Dark-ON

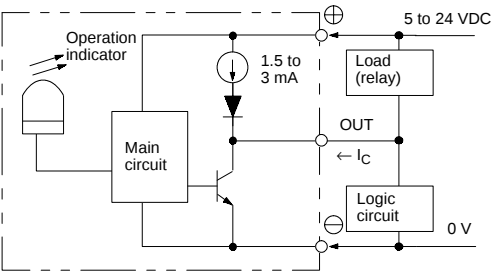


■ **TIMING CHART**

Light-ON

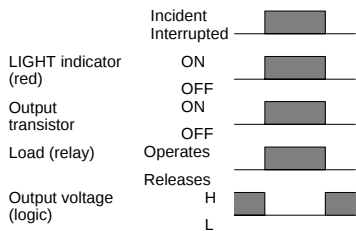


Dark-ON

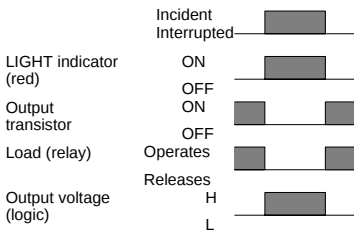


Dimensions

Unit: mm (inch)


EE-SPZ301W-01, EE-SPZ401W-01

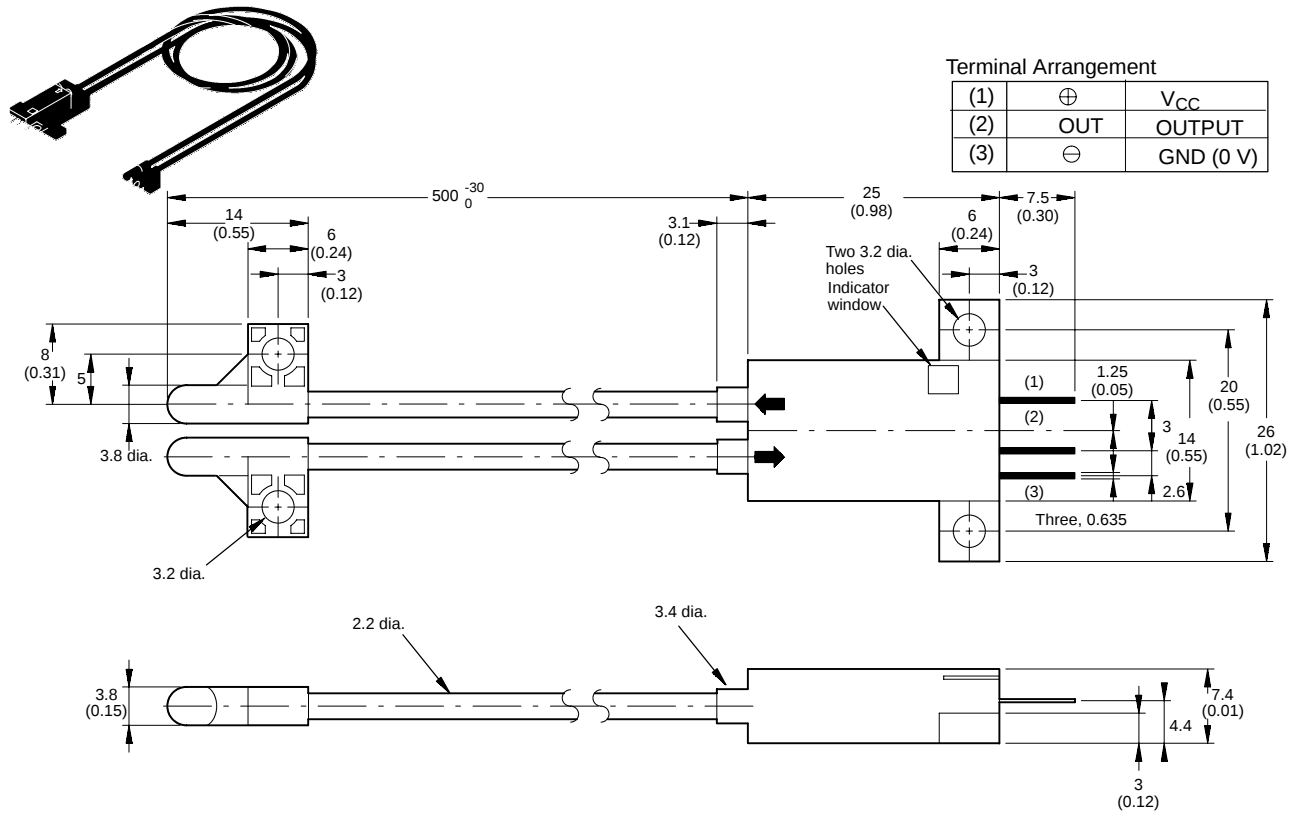


EE-SPZ301W-02, EE-SPZ401W-02

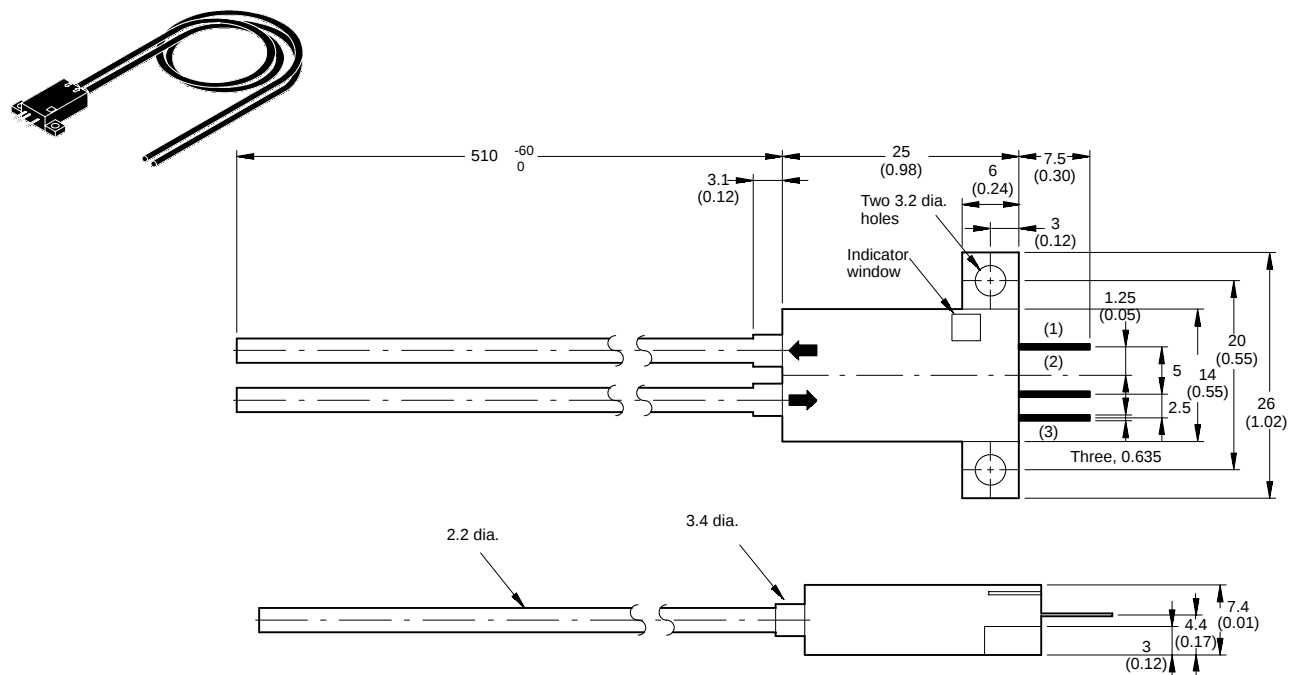


■ EE-SPZ301Y-01, EE-SPZ401Y-01

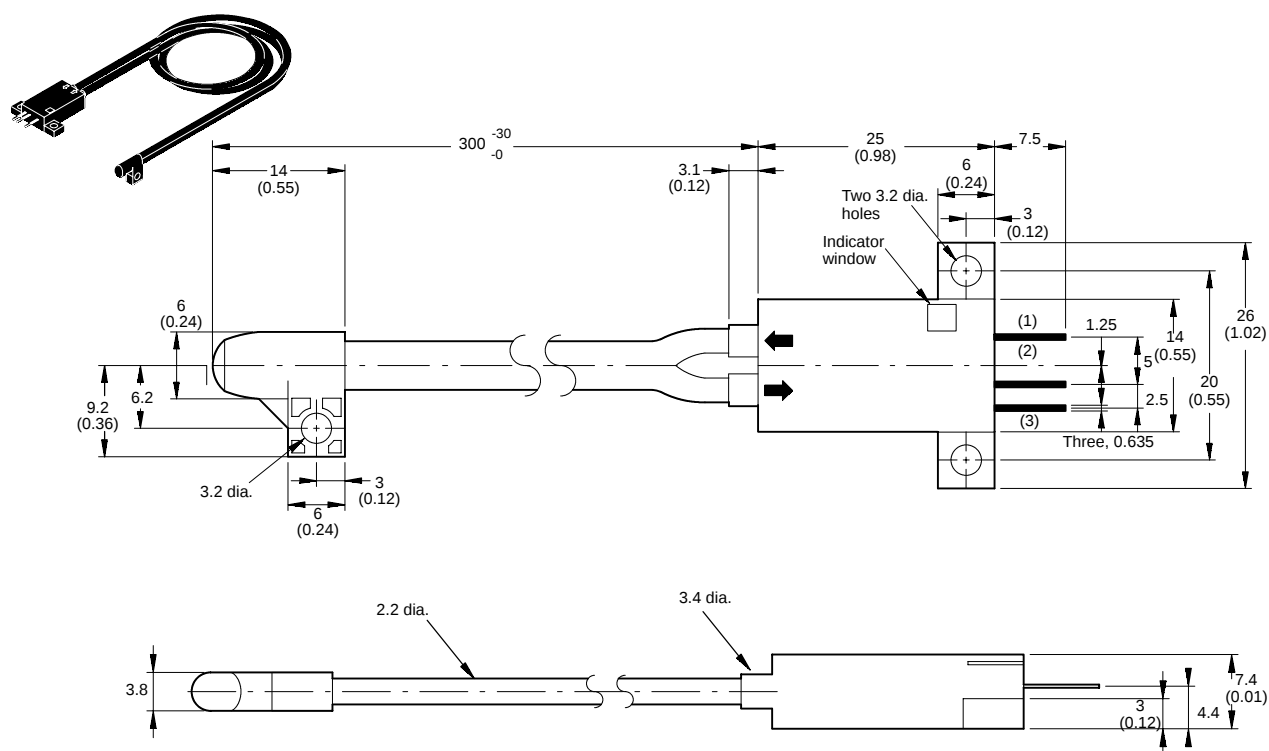


■ EE-1002 CONNECTOR

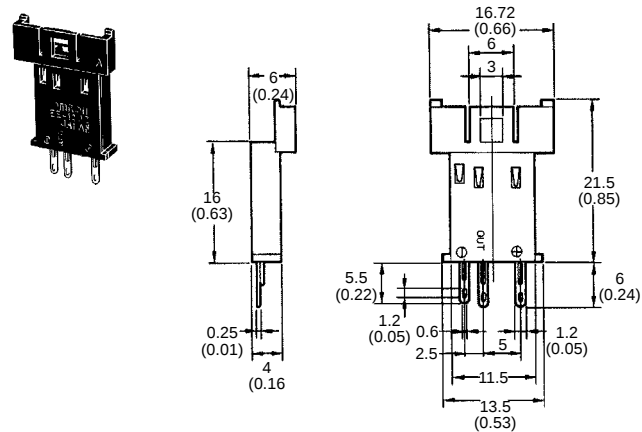

■ EE-SPZ□ + EE-1002



■ EE-1003 CONNECTOR

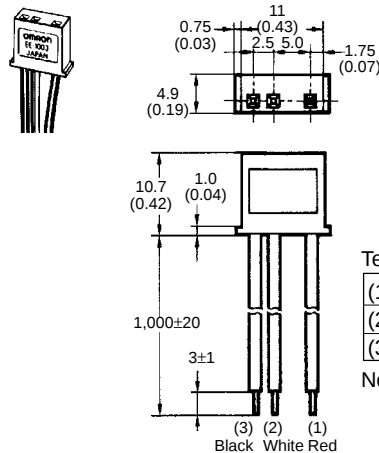


Terminal Arrangement

(1)	Brown (Red)	V _{CC}
(2)	Black (White)	OUTPUT
(3)	Blue (Black)	GND (O V)

Note: Older standard colors are shown in parentheses. The connector comes with a 1-m attached cable.

■ EE-1003A CONNECTOR HOLDER

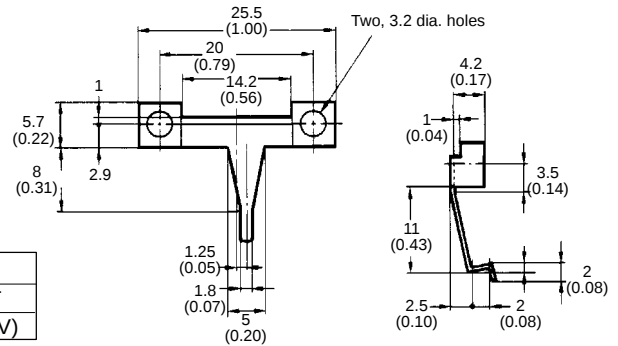


Precautions

Refer to the Technical Information Section for general precautions.

A fiber that has once been connected cannot be disconnected for re-use.

A cable with a thickness of AWG24 min. and a length of 5 m max. must be connected to the output terminals.

To use a cable longer than 5 m, attach a capacitor with a capacitance of approximately 10 μ F to the wires as shown below (the distance between the terminal and the capacitor must be within 5 m):

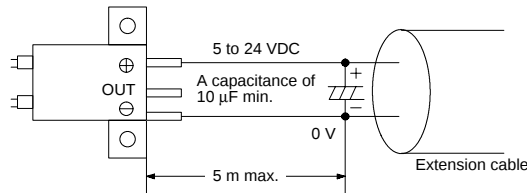


Due to optical problems, the sensing distance of the EE-SPZ must be a minimum of 1 mm, or malfunction will result.

Do not solder the cable to the connectors. Use the EE-1002 Connector or EE-1003 Connector (with a 1-m cable attached) to connect the cable to the output terminals.

Use the EE-1003A Connector Holder to prevent accidental disconnection of the EE-1003 Connector from the EE-SPZ Photomicrosensor.


Do not impose excessive force on the terminals (refer to the diagram below). Excess force will damage the terminals.



If the metal mounting base is subjected to inductive electrical noise, the photomicrosensor can be activated accidentally. If noise is a problem, take the following precautions:

1. Connect the negative terminal to the mounting base to ensure that there will be no difference in electric potential between the photomicrosensor and mounting base.
2. Connect the negative terminal to the mounting base via a 0.47- μ F capacitor.
3. Insert a plastic insulating plate with a thickness of approximately 10 mm between the photomicrosensor and mounting base.


Wire, as shown by the following illustration, to connect a small inductive load (a relay for example) to the photomicrosensor. A diode must be connected parallel to the relay to absorb the reverse voltage.

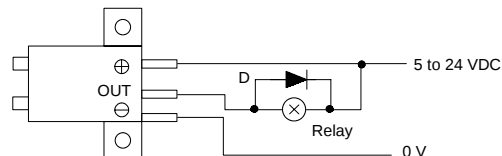


The maximum detectable distance of the EE-SPZ was determined by detecting a piece of white paper with a reflection factor of 90%. The maximum detectable distance of each product varies from one another by 4 to 10 mm. The background object must not be glossy.

■ POWER SUPPLY

When using a standard switching regulator, ground the FG and G terminal to ensure that the photomicrosensor will be in a stable operating condition.

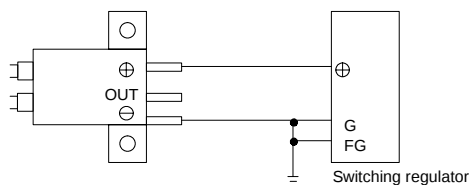

The connection force of the fiber and the Photomicrosensor will decrease when the ambient temperature is high. If high ambient temperatures can be expected, install the fiber with a holder or clip to ensure that the fiber will not pull off.

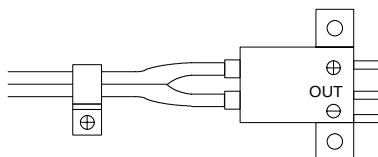

The optical fiber is jacketed with a protective polyethylene coat which should not be exposed to acetone, toluene, benzene, thinner, gasoline, or methyl alcohol.

NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

OMRON®

OMRON ELECTRONICS, INC.

One East Commerce Drive
Schaumburg, IL 60173

1-800-55-OMRON

OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8

416-286-6465