

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".



TYRE PRESSURE SENSOR FOR HEAVY VEHICLES

SP12T is a piezoresistive pressure sensor designed for tyre pressure measurement in heavy vehicle applications. The design is based on proven high-volume, low cost production processes developed for products to be used in automotive applications.

The sensor design is based upon SensoNor's proprietary and patented solutions aimed at high reliability measurements in harsh environments, still with a predictable and stable quality in high volume applications

The SP12T measures pressure, temperature and supply voltage, and by integrating these functions with an ASIC in one package, SensoNor has developed the ideal product for tyre pressure monitoring applications, offering the system designer the flexibility to determine sequences and functionality.

■ Pressure sensor:	Range:	50 to 1400kPa
■ Temperature sensor:	Range:	-40 to +125°C
■ Supply Voltage sensor:	Range:	1.8 to 3.6V

SP12T



An Infineon Technologies Company

Future Technology Today.

PRESSURE MEASUREMENTS

All specification limits to be understood as 5 sigma values. The specified values reflect the situation with an ideal voltage source (0 ohm internal resistance)

PARAMETER	SPECIFICATION			AMBIENT CONDITION		
	Unit	Min	Typ	Max	Temperature [°C]	Supply voltage [V]
Input range	kPa	50	--	1400	-40 to 125	50 - 1400
Resolution	kPa/lb		2.97		-40 to 125	50 - 1400
Measurement error	kPa	-28		28	0 to 50	50 - 1400
	kPa	-48		48	-20 to 70	50 - 1400
	kPa	-68		68	-40 to 125	50 - 1400
Measurement time	ms			6		

TEMPERATURE MEASUREMENTS

All specification limits to be understood as 5 sigma values

PARAMETER	SPECIFICATION			AMBIENT CONDITION	
	Unit	Min	Typ	Max	Supply voltage [V]
Input range	°C	-40		125	-40 to 125
Resolution	°C/lb		1		-40 to 125
Deviation from actual temperature	°C	-4		4	0 to 50
	°C	-5		5	-40 to 100
	°C	-8		8	100 to 125
	°C	-7		7	0 to 50
	°C	-10		10	-40 to 125
Measurement time	ms			1.5	

SUPPLY VOLTAGE MEASUREMENTS

All specification limits to be understood as 5 sigma values





PARAMETER	SPECIFICATION			AMBIENT CONDITION	
	Unit	Min	Typ	Max	Supply voltage [V]
Input range	V	1.8		3.6	-40 to 125
Resolution	V/lb		0.0184		-40 to 125
Measurement error	V	-0.1		0.1	-40 to 125
Delay time between supply voltage measurement command and sampling	ms	2.8	3.5	4.2	-40 to 125
Delay time between sampling and A/D conversion	ms	8	10	12	-40 to 125
Supply measurement time	ms			17	

ABSOLUTE MAXIMUM RATINGS

Prolonged exposure to values between recommended operating conditions and absolute maximum ratings might affect the performance or reliability of the device

PARAMETER	MIN	MAX	UNIT
Input pressure		3300	kPa
Storage temperature	-40	150	°C
Temperature in application	-40	150	°C
Temperature in application, transient	-40	175	°C
Supply voltage	-0.3	6.0	V
Input voltage, any pin	-0.3	VDD +0.3	V
Latch-up protection	-100	100	mA
ESD protection (machine model)	-200	200	VkV
ESD protection (human body model)	-2	2	g
Mechanical shock		2000	g
Static acceleration		2000	

PACKAGE TYPE 1

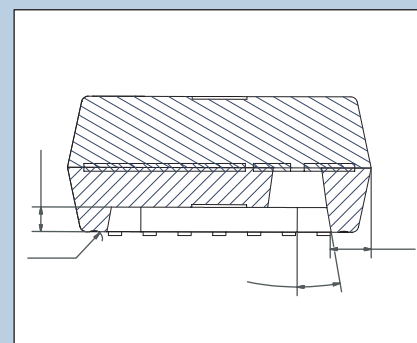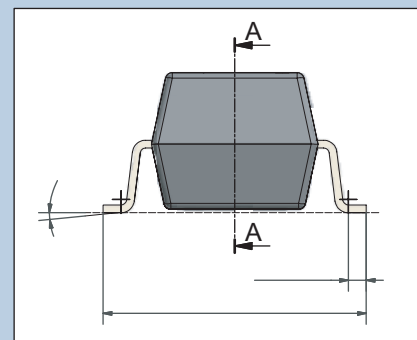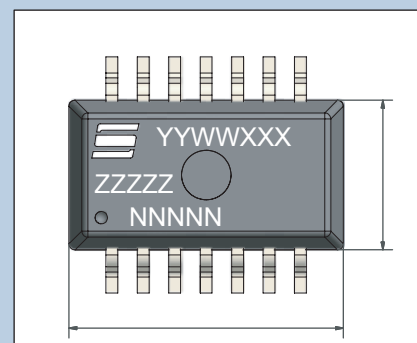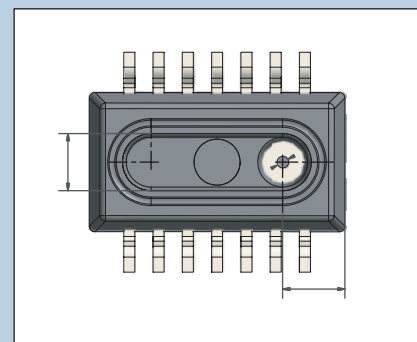

How to reach us:

Phone: +47 33 03 50 00
Fax: +47 33 03 50 05
www.sensonor.com
marketing@sensonor.no

Published by

SensoNor AS
Knudsrødveien 7
P.O.Box 196
N.3192 Horten
Norway
© SensoNor AS 2003. All Rights Reserved
October 2003, 1000 ex.

Attention please!

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits descriptions and charts stated herein.

Information

For further information on technology, delivery terms and conditions and prices please contact SensoNor AS