

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

**DESCRIPTION**

The LXM1623-05-44 is a Dual 4W RangeMAX™ Digital Dimming Output Direct Drive™ CCFL (Cold Cathode Fluorescent Lamp) Inverter Module specifically designed to be compatible with the Sharp LQ104S1DG21 / 51 10.4", LQ121S1DG31 / 41 12.1" as well as the Samsung LTM121SI-T01 12.1" or similar dual lamp displays that have both individual lamp output connectors on the top side of the panel.

LXM1623 modules provide the designer with a vastly superior display brightness range. This brightness range is achievable with virtually any LCD display.

The modules are available with a dimming input that permits brightness control from either, a DC voltage source, a PWM signal or external potentiometer.

The maximum output current is externally programmable (through the input connector) over a range of 5.2 to 6.7mA in 0.5mA steps. This allows the inverter to match the panel's lamp current specifications, or it can be used to purposely drive the lamps at a lower current to save power or lower nominal brightness.

RangeMAX™ Digital Dimming Technique provides flicker-free brightness control in any wide range typically (50:1+) dimming application.

The resultant "burst drive" that energizes the lamp is designed specifically to ensure that no premature lamp degradation occurs, while allowing significant power savings at lower dim levels.

The modules convert DC voltage from the system battery or AC adapter directly to high frequency, high-voltage waves required to ignite and operate CCFL lamps. A 12V input inverter is also available (LXM1623-12-44).

The modules design utilizes Microsemi's LX1689 backlight controller, which provides a number of cost and performance advantages due to the controller's high level of integration.

Other benefits of this new topology are stable fixed-frequency operation, secondary-side strike-voltage regulation, and both open/shorted lamp protection with fault timeout.

**KEY FEATURES**

- Externally Programmable Maximum Output Current
- Easy to Use Brightness Control
- RangeMAX Wide Range Dimming
- Output Open & Short-Circuit Protection and Automatic Strike-Voltage Regulation and Timeout
- Fixed Frequency Operation
- Rated From -20 to 70°C

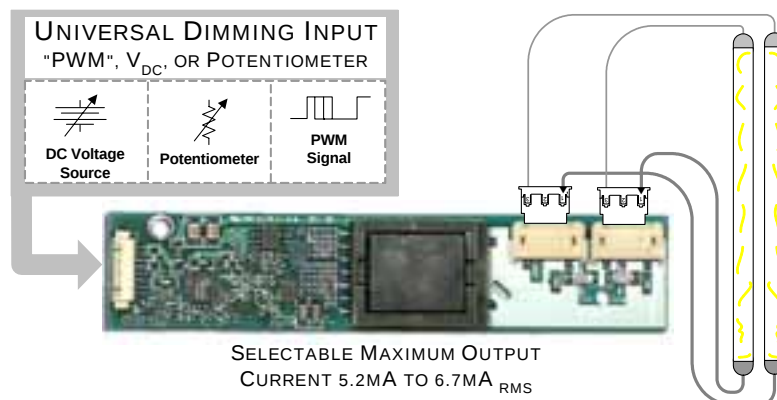
**APPLICATIONS**

- LCD's Requiring Both Output Connectors on One Side of Panel
- Sharp LQ104S1DG21/51 and LQ121S1DG31 / 41
- Samsung LTM121SI-T01
- Desktop Displays
- Industrial Display Controls

**BENEFITS**

- Smooth, Flicker Free 2%-100% Full-Range Brightness Control
- Programmable Output Current Allows Inverter to Mate With a Wide Variety of LCD Panel's Specifications
- Output Open Circuit Voltage Regulation Minimizes Corona Discharge For High Reliability

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>  
 Protected By U.S. Patents: 5,923,129; 5,930,121; 6,198,234; Patents Pending

**PRODUCT HIGHLIGHT**

**PACKAGE ORDER INFO**

| PART NUMBER   | OUTPUT CONNECTOR                                 | INVERTER MATES DIRECTLY TO PANEL CONNECTORS |
|---------------|--------------------------------------------------|---------------------------------------------|
| LXM1623-05-44 | JST SM02(8.0)B-BHS-1-TB or Yeon Ho 20015WR-05A00 | JST BHR-03VS-1                              |

**ABSOLUTE MAXIMUM RATINGS (NOTE 1)**

|                                                   |                                            |
|---------------------------------------------------|--------------------------------------------|
| Input Signal Voltage ( $V_{IN1}$ ).....           | -0.3V to 6.5V                              |
| Input Power .....                                 | 10W                                        |
| Output Voltage, no load .....                     | Internally Limited to 1800V <sub>RMS</sub> |
| Output Current .....                              | 7.5mA <sub>RMS</sub> (Internally Limited)  |
| Output Power (each output) .....                  | 4.0W                                       |
| Input Signal Voltage (SLEEP Input).....           | -0.3V to 5.5V                              |
| Input Signal Voltage (BRITE) .....                | -0.3V to 5.5V                              |
| Ambient Operating Temperature, zero airflow.....  | -20°C to 70°C                              |
| Operating Relative Humidity, non-condensing ..... | ≤90%                                       |
| Storage Temperature Range.....                    | -40°C to 85°C                              |

Note 1: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

**RECOMMENDED OPERATING CONDITIONS (R.C.)**

This module has been designed to operate over a wide range of input and output conditions. However, best efficiency and performance will be obtained if the module is operated under the condition listed in the 'R.C.' column. Min. and Max. columns indicate values beyond which the inverter, although operational, will not function optimally.

| Parameter                                                 | Symbol         | Recommended Operating Conditions |      |      | Units             |
|-----------------------------------------------------------|----------------|----------------------------------|------|------|-------------------|
|                                                           |                | Min                              | R.C. | Max  |                   |
| Input Supply Voltage Range (Fully Regulated Lamp Current) | $V_{IN1}$      | 4.75                             | 5    | 5.25 | V                 |
| Input Supply Voltage Range (Functional)                   |                | 4.5                              | 5    | 5.5  |                   |
| Output Power (each output)                                | $P_O$          |                                  | 3.5  | 4.0  | W                 |
| Linear BRITE Control Input Voltage Range                  | $V_{BRT\_ADJ}$ | 0.5                              |      | 2.0  | V                 |
| Lamp Operating Voltage                                    | $V_{LAMP}$     | 450                              | 530  | 610  | V <sub>RMS</sub>  |
| Lamp Current (Full Brightness)                            | $I_{OLAMP}$    | 5.2                              |      | 6.7  | mA <sub>RMS</sub> |
| Operating Ambient Temperature Range                       | $T_A$          | -20                              |      | 70   | °C                |

**ELECTRICAL CHARACTERISTICS**

Unless otherwise specified, the following specifications apply over the recommended operating condition and ambient temperature of 25°C except where otherwise noted.

| Parameter                               | Symbol              | Test Conditions                                                                                                                                                             | LXM1623-05-44 |      |     | Units             |
|-----------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------|-----|-------------------|
|                                         |                     |                                                                                                                                                                             | Min           | Typ  | Max |                   |
| ▶ OUTPUT PIN CHARACTERISTICS            |                     |                                                                                                                                                                             |               |      |     |                   |
| Full Bright Lamp Current (each output)  | I <sub>L(MAX)</sub> | V <sub>BRT_ADJ</sub> ≥ 2.0V <sub>DC</sub> , $\overline{\text{SLEEP}}$ ≥ 2.0V, V <sub>IN1</sub> = 5V <sub>DC</sub><br>I <sub>SET1</sub> = Ground, I <sub>SET2</sub> = Ground | 4.7           | 5.2  | 5.7 | mA <sub>RMS</sub> |
| Full Bright Lamp Current (each output)  | I <sub>L(MAX)</sub> | V <sub>BRT_ADJ</sub> ≥ 2.0V <sub>DC</sub> , $\overline{\text{SLEEP}}$ ≥ 2.0V, V <sub>IN1</sub> = 5V <sub>DC</sub><br>I <sub>SET1</sub> = Ground, I <sub>SET2</sub> = Open   | 5.2           | 5.7  | 6.2 | mA <sub>RMS</sub> |
| Full Bright Lamp Current (each output)  | I <sub>L(MAX)</sub> | V <sub>BRT_ADJ</sub> ≥ 2.0V <sub>DC</sub> , $\overline{\text{SLEEP}}$ ≥ 2.0V, V <sub>IN1</sub> = 5V <sub>DC</sub><br>I <sub>SET1</sub> = Open, I <sub>SET2</sub> = Ground   | 5.7           | 6.2  | 6.7 | mA <sub>RMS</sub> |
| Full Bright Lamp Current (each output)  | I <sub>L(MAX)</sub> | V <sub>BRT_ADJ</sub> ≥ 2.0V <sub>DC</sub> , $\overline{\text{SLEEP}}$ ≥ 2.0V, V <sub>IN1</sub> = 5V <sub>DC</sub><br>I <sub>SET1</sub> = Open, I <sub>SET2</sub> = Open     | 6.2           | 6.7  | 7.2 | mA <sub>RMS</sub> |
| Output Current Lamp to Lamp Deviation   | I <sub>LL%DEV</sub> | V <sub>BRT_ADJ</sub> ≥ 2.0V <sub>DC</sub> , $\overline{\text{SLEEP}}$ ≥ 2.0V, V <sub>IN1</sub> = 5V <sub>DC</sub><br>I <sub>SET1</sub> = Open, I <sub>SET2</sub> = Open     |               | 3    | 10  | %                 |
| Min. Average Lamp Current (each output) | I <sub>L(MIN)</sub> | V <sub>BRT_ADJ</sub> ≤ 0.5V <sub>DC</sub> , $\overline{\text{SLEEP}}$ ≥ 2.0V, V <sub>IN1</sub> = 5V <sub>DC</sub><br>I <sub>SET1</sub> = I <sub>SET2</sub> = Ground         |               | 0.30 |     | mA <sub>RMS</sub> |
| Lamp Start Voltage                      | V <sub>LS</sub>     | -20°C < T <sub>A</sub> < 70°C, V <sub>IN1</sub> > 4.5V <sub>DC</sub>                                                                                                        | 1450          | 1600 |     | V <sub>RMS</sub>  |
| Operating Frequency                     | f <sub>O</sub>      | V <sub>BRT_ADJ</sub> = 2.5V <sub>DC</sub> , $\overline{\text{SLEEP}}$ ≥ 2.0V, V <sub>IN1</sub> = 5V                                                                         | 57            | 60   | 63  | kHz               |
| Burst Frequency                         | f <sub>BURST</sub>  | Output Burst Frequency                                                                                                                                                      | 222           | 234  | 246 | Hz                |



## ELECTRICAL CHARACTERISTICS (CONTINUED)

Unless otherwise specified, the following specifications apply over the recommended operating condition and ambient temperature of 25°C except where otherwise noted.

| Parameter                           | Symbol               | Test Conditions                                                                                                                                                             | LXM1623-05-44 |      |                  | Units            |
|-------------------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------|------------------|------------------|
|                                     |                      |                                                                                                                                                                             | Min           | Typ  | Max              |                  |
| ▶ BRITE INPUT                       |                      |                                                                                                                                                                             |               |      |                  |                  |
| Input Current                       | I <sub>BRT</sub>     | V <sub>BRT_ADJ</sub> = 0V <sub>DC</sub>                                                                                                                                     |               | -300 |                  | μA <sub>DC</sub> |
|                                     |                      | V <sub>BRT_ADJ</sub> = 3V <sub>DC</sub>                                                                                                                                     |               | 50   |                  | μA <sub>DC</sub> |
| Minimum Input for Max. Lamp Current | V <sub>BRT_ADJ</sub> | I <sub>O(LAMP)</sub> = Maximum Lamp Current                                                                                                                                 |               | 2.0  | 2.05             | V <sub>DC</sub>  |
| Maximum Input for Min. Lamp Current | V <sub>BRT_ADJ</sub> | I <sub>O(LAMP)</sub> = Minimum Lamp Current                                                                                                                                 | 0.4           | 0.5  |                  | V <sub>DC</sub>  |
| ▶ SLEEP INPUT                       |                      |                                                                                                                                                                             |               |      |                  |                  |
| RUN Mode                            | V <sub>SLEEP</sub>   |                                                                                                                                                                             | 2.0           |      | V <sub>IN1</sub> | V <sub>DC</sub>  |
| SLEEP Mode                          | V <sub>SLEEP</sub>   |                                                                                                                                                                             | -0.3          |      | 0.8              | V <sub>DC</sub>  |
| ▶ SET <sub>1,2</sub> INPUT          |                      |                                                                                                                                                                             |               |      |                  |                  |
| SET <sub>1,2</sub> Low Threshold    | V <sub>L</sub>       |                                                                                                                                                                             |               |      | 0.4              | V                |
| Input Current                       | I <sub>SET</sub>     | V <sub>SET</sub> ≤ 0.4V                                                                                                                                                     |               | -300 |                  | μA               |
| ▶ POWER CHARACTERISTICS             |                      |                                                                                                                                                                             |               |      |                  |                  |
| Sleep Current                       | I <sub>IN(MIN)</sub> | V <sub>IN1</sub> = 5V <sub>DC</sub> , $\overline{\text{SLEEP}} \leq 0.8V$                                                                                                   | 0.0           | 10   | 50               | μA <sub>DC</sub> |
| Run Current                         | I <sub>IN(RUN)</sub> | V <sub>IN1</sub> = 5V <sub>DC</sub> , $\overline{\text{SLEEP}} \geq 2.0V$ , I <sub>SET1</sub> = Open<br>I <sub>SET2</sub> = Ground, V <sub>LAMP</sub> = 500V <sub>RMS</sub> |               | 1460 |                  | mA <sub>DC</sub> |
| Efficiency                          | η                    | V <sub>IN1</sub> = 5V <sub>DC</sub> , $\overline{\text{SLEEP}} \geq 2.0V$ , I <sub>SET1</sub> = Open<br>I <sub>SET2</sub> = Ground, V <sub>LAMP</sub> = 500V <sub>RMS</sub> |               | 82   |                  | %                |

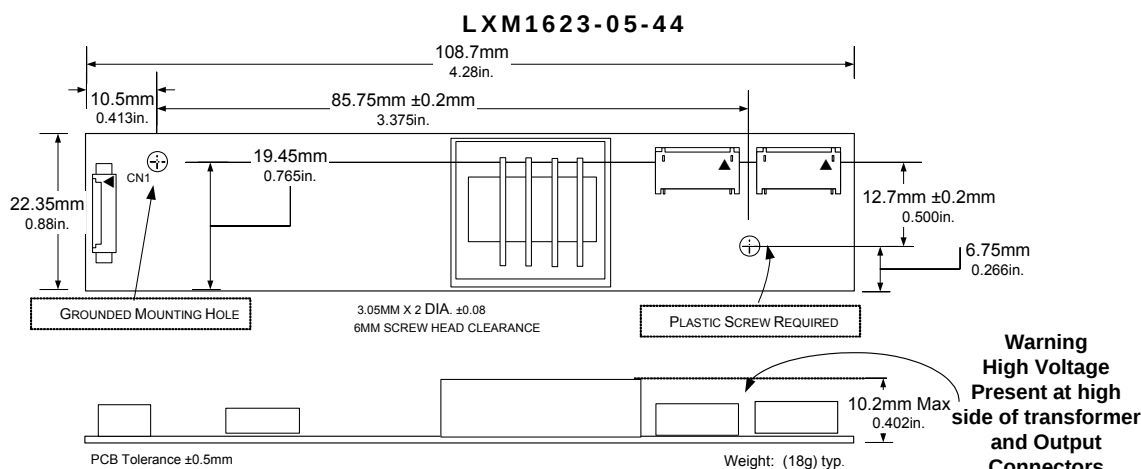
## FUNCTIONAL PIN DESCRIPTION

| CONN                                                                                                                 | PIN                | DESCRIPTION                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <b>CN1</b> (Molex 53261-0890) Mates with 51021-0800 housing, 50079-8100 pins. Mates with LX9501 input cable assembly |                    |                                                                                                                                       |
| CN1-1                                                                                                                | $V_{IN1}$          | Main Input Power Supply ( $4.75 \leq V_{IN1} \leq 5.25V$ )                                                                            |
| CN1-2                                                                                                                |                    |                                                                                                                                       |
| CN1-3                                                                                                                | GND                | Power Supply Return                                                                                                                   |
| CN1-4                                                                                                                |                    |                                                                                                                                       |
| CN1-5                                                                                                                | $\overline{SLEEP}$ | ON/OFF Control. ( $0V < \overline{SLEEP} < 0.8 = \text{OFF}, \overline{SLEEP} \geq 2.0V = \text{ON}$ )                                |
| CN1-6                                                                                                                | BRITE              | Brightness Control ( $0.5V$ to $2.0V_{DC}$ ). $2.0V_{DC}$ gives maximum lamp current.                                                 |
| CN1-7                                                                                                                | SET <sub>1</sub>   | SET <sub>1</sub> MSB Connecting this pin to ground decreases the output current (see Table 1)                                         |
| CN1-8                                                                                                                | SET <sub>2</sub>   | SET <sub>2</sub> LSB Connecting this pin to ground decreases the output current (see Table 1)                                         |
| <b>CN2, CN3 for LXM1623-05-44</b> (JST SM02(8.0)B-BHS-1-TB or Yeon Ho 20015WR-05A00)                                 |                    |                                                                                                                                       |
| CN2-1<br>CN3-1                                                                                                       | $V_{HI}$           | High voltage connection to high Side of lamp. Connect to lamp terminal with shortest lead length.<br><b>DO NOT</b> connect to Ground. |
| CN2-2<br>CN3-2                                                                                                       | $V_{LO}$           | Connection to low side of lamp. Connect to lamp terminal with longer lead length.<br><b>DO NOT</b> connect to Ground                  |

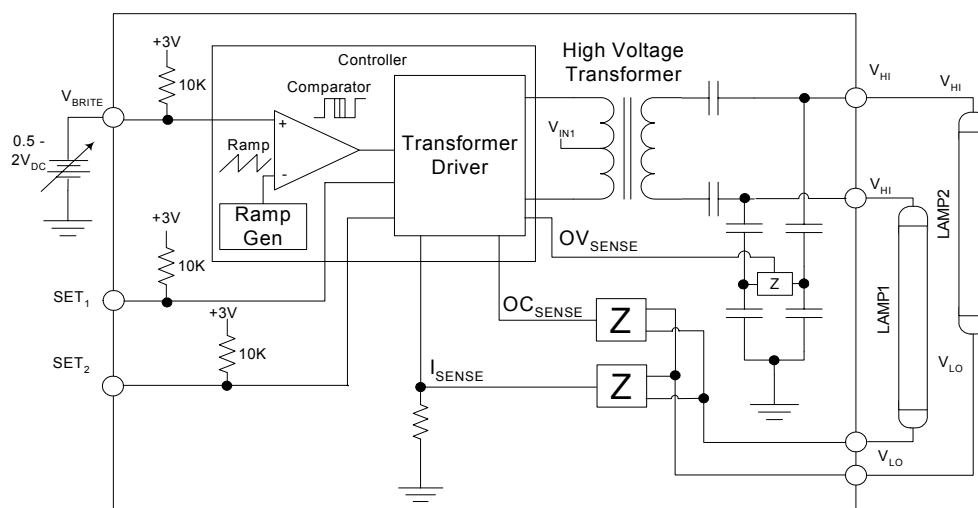
**TABLE 1**
**OUTPUT CURRENT SETTINGS**

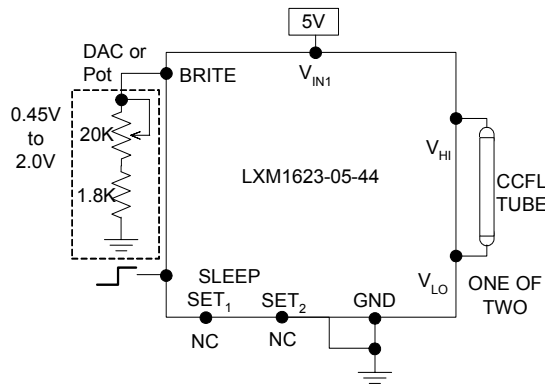
| SET <sub>1</sub><br>(Pin 7) | SET <sub>2</sub><br>(Pin 8) | Nominal Output Current |
|-----------------------------|-----------------------------|------------------------|
| Open*                       | Open*                       | 6.7mA                  |
| Open*                       | Ground                      | 6.2mA                  |
| Ground                      | Open*                       | 5.7mA                  |
| Ground                      | Ground                      | 5.2mA                  |

\* If driven by a logic signal it should be open collector or open drain only, not a voltage source.

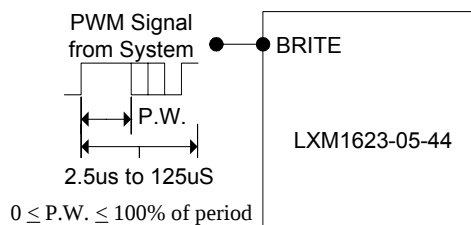
**PHYSICAL DIMENSIONS**


Dimensions are in millimeters (inches are for reference)

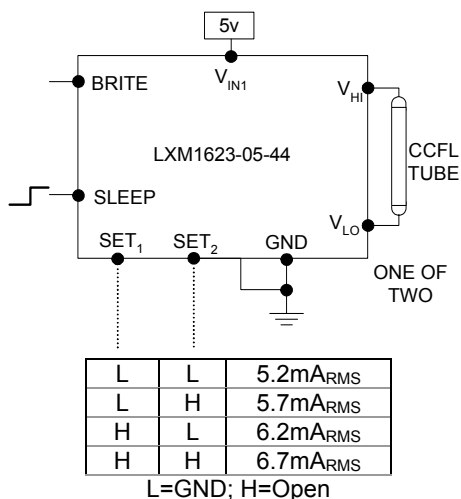
**SIMPLIFIED BLOCK DIAGRAM**


**TYPICAL APPLICATION**


**Figure 1 – Brightness Control**  
(Output current set to maximum)



**Figure 1A – PWM Brightness Control**



**Figure 2 – Max Output Current**  
(SET<sub>1</sub> and SET<sub>2</sub> Inputs)

- The brightness control may be a voltage output DAC or other voltage source, a digital pot or 20K manual pot. The inverter contains an internal 10K pull-up to 3V to bias the pot, add a 1.8K resistor to set the lower threshold voltage. A 3.3V Logic Level PWM signal from a micro-controller may also be used as shown in Figure 1A.
- If you need to turn the inverter ON/OFF remotely, connect to TTL logic signal to the SLEEP input.
- Connect V<sub>HI</sub> to high voltage wire from the lamp. Connect V<sub>LO</sub> to the low voltage wire (wire with thinner insulation). Never connect V<sub>LO</sub> to circuit ground as this will defeat lamp current regulation. If both lamp wires have heavy high voltage insulation, connect the longest wire to V<sub>LO</sub>. This wire is typically white.
- Use the SET<sub>1</sub> and SET<sub>2</sub> (see Figure 2) inputs to select the desired maximum output current. Using these two pins in combination allows the inverter to match a wide variety of panels from different manufactures. Generally, the best lamp lifetime correlates with driving the CCFL at the manufactures nominal current setting. However, the SET<sub>1</sub> and SET<sub>2</sub> inputs allow the user the flexibility to adjust the current to the maximum allowable output current to increase panel brightness at the expense of some reduced lamp life.
- Although the SET pins are designed such that just leaving them open or grounding them is all that is needed to set the output current, they can also be actively set. Using an open collector or open drain logic signal will allow you to reduce the lamp current for situations where greater dim range is required, as an example in nighttime situations. In conjunction with a light sensor or other timer the panel could be set to higher brightness (maximum output current) for daytime illumination and lower brightness (minimum or typical output current) at nighttime. Since the dim ratio is a factor of both the burst duty cycle and the peak output current, using this technique the effective dim ratio can be increased greater than the burst duty cycle alone. Conversely, the SET inputs could be used to overdrive the lamp temporarily to facilitate faster lamp warm up at initial lamp turn on. Of course, any possible degradation on lamp life from such practices is the users responsibility since not all lamps are designed to be overdriven.
- The inverter has a built in fault timeout function. If the output is open (lamp disconnected or broken) or shorted the inverter will attempt to strike the lamp for several seconds. After about 3 seconds without success the inverter will shutdown. In order to restart the inverter it is necessary to toggle the sleep input or cycle the V<sub>IN1</sub> input supply



**Microsemi**  
INTEGRATED PRODUCTS

PanelMatch™

LXM1623-05-44

5V Dual 4W CCFL Programmable Inverter Module

PRODUCTION DATASHEET

## NOTES

PRODUCTION DATA – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.