

## 阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

## Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

**DESCRIPTION**

**The Dual Output Module Ideal for Desktop and Industrial Applications.** The LXMG1620 Direct Drive<sup>™</sup> Cold Cathode Fluorescent Lamp (CCFL) Inverter is a single module designed to drive two lamps and is targeted for use with desktop Liquid Crystal Display (LCD) and industrial LCD panels typically ranging in size from 10.4-inches to 17-inches. This two output inverter is the ideal solution to power virtually any two lamp application.

**Direct Drive Technology.** The module design is based on a new patented<sup>1</sup> Direct Drive topology, which provides a number of cost and performance advantages. The LXMG1620-01 Direct Drive inverters eliminate the classic resonant inductor and capacitors, thus reducing cost and allowing a substantial reduction in module size.

**Fixed-Frequency Operation.** Other benefits of this new topology are fixed-frequency operation and secondary-side strike-voltage regulation. Strike-voltage regulation minimizes corona discharge in the output transformer and related circuitry, providing longer life and higher reliability.

**Fail-safe Feature For Multiple Lamp Applications.**

Our multi-output inverters are designed to keep your application operating at near normal brightness in the event that a lamp fails.

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

This allows the display to remain "on-line" until lamp replacement is convenient.

**Dual Module Uses Standard Power Supply.** The LXMG1620 module uses a standard 12V  $\pm 10\%$  input supply. It also ensures nominal power consumption with 2 lamps requiring only 8 watts. Lamp current is fully regulated with respect to input voltage and output impedance variations.

**Dimming Features.** The LXMG1620 modules are equipped with a dimming input that permits brightness control from an external potentiometer or DC voltage. In addition, the sleep input reduces module power to a few microwatts in shut down mode. All LXMG1620 modules feature both output open and short-circuit protection.

**The Most Efficient and Cost-effective Backlight Inverter for Desktop/ Industrial Applications.** Microsemi's proprietary Direct Drive architecture is the highest efficiency, small form factor solution for all multiple lamp applications. The LXMG1620 is fully customizable (electronically and mechanically) to specific customer requirements.

<sup>1</sup>US Patent Numbers: 5923129 & 5930121

**KEY FEATURES**

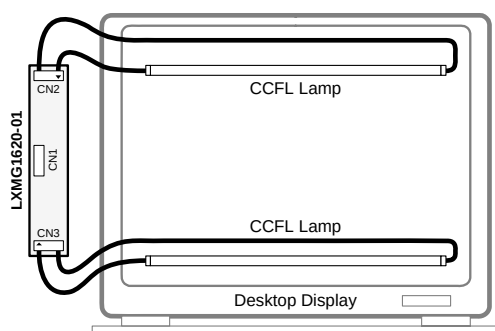
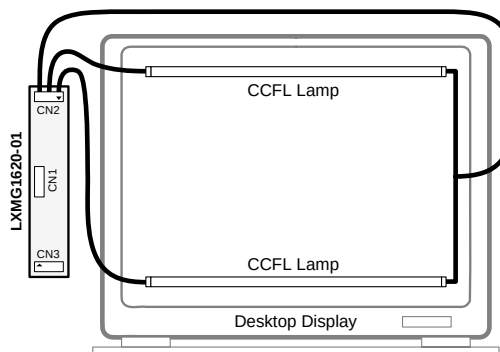
- Drive Two Lamps With One Module
- Small, Compact Size
- High Efficiency
- Multiple Outputs Provide Easy LCD Connections
- Low EMI And Noise
- Low Power Sleep Mode
- Output Short And Open Circuit Protection
- 3:1 Dimming Control
- Adjustable Lamp Current Up To 6.0mA Per Lamp
- Long Lamp Life With Soft-Start And Accurate Lamp Current Regulation
- RoHS Compliant

**APPLICATIONS**

- Desktop LCD Monitors And Panels
- Industrial LCD Panels
- Hi-Brite Displays

**BENEFITS**

- Cool Operation
- Smooth, Easy-To-Use Brightness Control
- Single 12 Volt Supply

**PRODUCT HIGHLIGHT**
**Dual Connector Configuration**

**Single Connector Configuration**

**PACKAGE ORDER INFO**

| Part Number | Lamp Run Voltage        | Lamp Current |
|-------------|-------------------------|--------------|
| LXMG1620-01 | 500-750V <sub>RMS</sub> | 6mA          |

This Part is Not Recommended for new design, see the LXMG1624-12-61

**ABSOLUTE MAXIMUM RATINGS**

|                                                |                                            |
|------------------------------------------------|--------------------------------------------|
| Input Supply Voltage ( $V_{IN}$ )              | -0.3V to 18V                               |
| Output Voltage, no load                        | Internally Limited to 1800V <sub>RMS</sub> |
| Output Current                                 | 10mA <sub>RMS</sub> (Internally Limited)   |
| Output Power (Per Lamp)                        | 6.0W                                       |
| Input Signal Voltage, (SLEEP and BRITE Inputs) | -0.3V to $V_{IN}$                          |
| Ambient Operating Temperature                  | 0°C to 70°C                                |
| Storage Temperature Range                      | -40°C to 85°C                              |

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

**RECOMMENDED OPERATING CONDITIONS**

This module has been designed to operate over a wide range of input and output conditions. However, best efficiency and performance will be obtained if the module is operated under the condition listed in the 'R.C.' column. Min. and Max. columns indicate values beyond which the inverter, although operational, will not function optimally.

| Parameter                                           | Symbol         | LXMG1620-01 |      |      | Units             |
|-----------------------------------------------------|----------------|-------------|------|------|-------------------|
|                                                     |                | Min         | R.C. | Max  |                   |
| Input Supply Voltage Range (Functional)             | $V_{IN}$       | 10.2        | 12   | 16   | V                 |
| Input Supply Voltage (Fully Regulated Lamp Current) |                | 10.2        | 12   | 13.8 | V                 |
| Output Power (Per Lamp)                             | $P_O$          |             | 4    | 5    | W                 |
| Brightness Control Input Voltage Range              | $V_{BRT\_ADJ}$ | 0           |      | 5    | V                 |
| Lamp Operating Voltage                              | $V_{LAMP}$     | 500         | 625  | 750  | V <sub>RMS</sub>  |
| Lamp Current (Full Brightness – Per Lamp)           | $I_{OLAMP}$    |             | 6    |      | mA <sub>RMS</sub> |
| Operating Ambient Temperature Range                 | $T_A$          | 0           |      | 70   | °C                |

**ELECTRICAL CHARACTERISTICS**

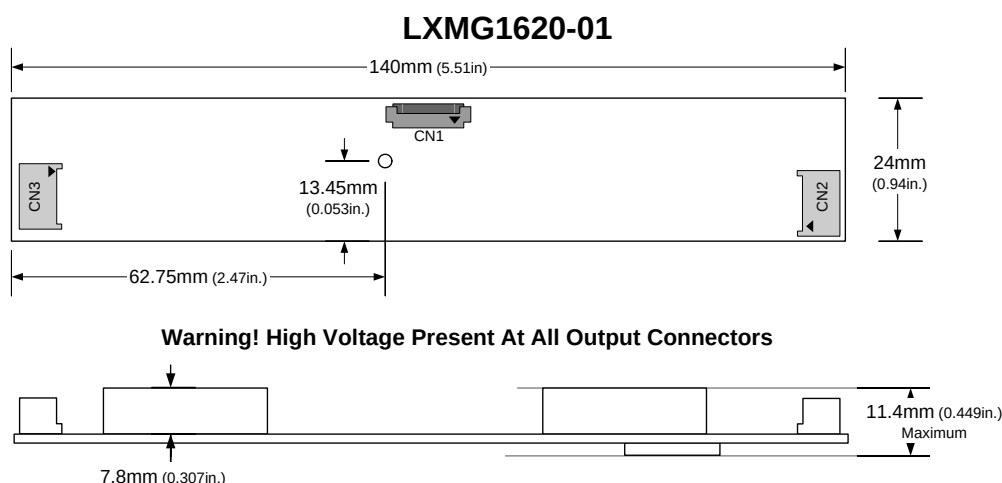
Unless otherwise specified, these specifications apply over the recommended operating conditions and 25°C ambient temperature for the LXMG1620-01.

| Parameter                              | Symbol                           | Test Conditions                                                                                                   | LXMG1620-01 |     |                 | Units             |
|----------------------------------------|----------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------|-----|-----------------|-------------------|
|                                        |                                  |                                                                                                                   | Min         | Typ | Max             |                   |
| ▶ <b>OUTPUT PIN CHARACTERISTICS</b>    |                                  |                                                                                                                   |             |     |                 |                   |
| Full Bright Lamp Current (Per Lamp)    | I <sub>L(MAX)</sub>              | V <sub>BRT_ADJ</sub> = 5.0V <sub>DC</sub> , $\overline{\text{SLEEP}}$ = HIGH, V <sub>IN</sub> = 12V <sub>DC</sub> | 5.4         | 6.0 | 6.6             | mA <sub>RMS</sub> |
| Minimum Lamp Current (Per Lamp) Note 2 | I <sub>L(MIN)</sub>              | V <sub>BRT_ADJ</sub> = 0V <sub>DC</sub> , $\overline{\text{SLEEP}}$ = HIGH, V <sub>IN</sub> = 12V <sub>DC</sub>   |             | 0.5 |                 | mA <sub>RMS</sub> |
| Lamp Start Voltage                     | V <sub>LS</sub>                  | 0°C < T <sub>A</sub> < 40°C, V <sub>IN</sub> > 10.8V <sub>DC</sub>                                                | 1500        |     | 1800            | V <sub>RMS</sub>  |
| Operating Frequency                    | f <sub>O</sub>                   | V <sub>BRT_ADJ</sub> = 5.0V <sub>DC</sub> , $\overline{\text{SLEEP}}$ = HIGH V <sub>IN</sub> = 12V <sub>DC</sub>  | 52          | 57  | 62              | KHz               |
| ▶ <b>BRITE INPUT</b>                   |                                  |                                                                                                                   |             |     |                 |                   |
| Input Current                          | I <sub>BRT</sub>                 | V <sub>BRT_ADJ</sub> = 0V <sub>DC</sub>                                                                           | -6          | -8  | -10             | μA <sub>DC</sub>  |
| Input Voltage for Max. Lamp Current    | V <sub>C</sub>                   | I <sub>O(LAMP)</sub> = 100%                                                                                       |             | 5.0 |                 | V <sub>DC</sub>   |
| Input Voltage for Min. Lamp Current    | V <sub>C</sub>                   | I <sub>O(LAMP)</sub> = Minimum                                                                                    |             | 0   |                 | V <sub>DC</sub>   |
| ▶ <b>SLEEP INPUT</b>                   |                                  |                                                                                                                   |             |     |                 |                   |
| RUN Mode                               | V $\overline{\text{SLEEP}}$ (HI) |                                                                                                                   | 2.2         |     | V <sub>IN</sub> | V <sub>DC</sub>   |
| SLEEP Mode                             | V $\overline{\text{SLEEP}}$ (LO) |                                                                                                                   | -0.3        |     | 0.8             | V <sub>DC</sub>   |
| Input Current                          | I $\overline{\text{SLEEP}}$      | $\overline{\text{SLEEP}}$ = 5.0V                                                                                  | 60          | 120 | 180             | μA <sub>DC</sub>  |
| ▶ <b>POWER CHARACTERISTICS</b>         |                                  |                                                                                                                   |             |     |                 |                   |
| Sleep Current                          | I <sub>IN(MIN)</sub>             | V <sub>IN</sub> = 12V <sub>DC</sub> , $\overline{\text{SLEEP}}$ = 0V <sub>DC</sub>                                | 0           | 1   | 50              | μA <sub>DC</sub>  |

**SPARE TABLE**

| Conn       | Pin   | Description                                                                                      |
|------------|-------|--------------------------------------------------------------------------------------------------|
| <b>CN1</b> |       |                                                                                                  |
| CN1-1, 2   | VIN   | Input Power Supply ( $10.2V < VIN < 16V$ )                                                       |
| CN1-3, 4   | GND   | Power Supply Return                                                                              |
| CN1-5      | SLEEP | ON/OFF Control ( $2.2V < \overline{SLEEP} < VIN - ON$ , $-0.3V < \overline{SLEEP} < 0.8V$ - OFF) |
| CN1-6      | BRITE | Brightness Control ( $-0.3V$ to $5.0VDC$ ) $5.0VDC$ gives maximum lamp current.                  |
| CN1-7, 8   | N.C.  | Leave Unconnected.                                                                               |

**CN2 and CN3:** Refer to figure 1

**PHYSICAL DIMENSIONS**


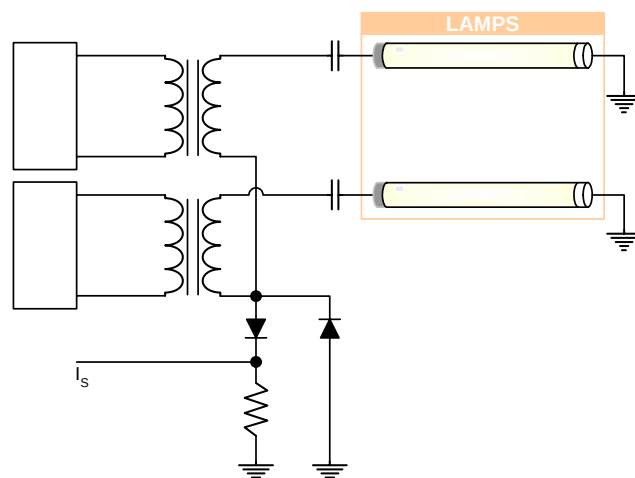
All dimensions are in millimeters, inches are for reference only.

**FAILSAFE FEATURES FOR MULTIPLE LAMP OPERATION**

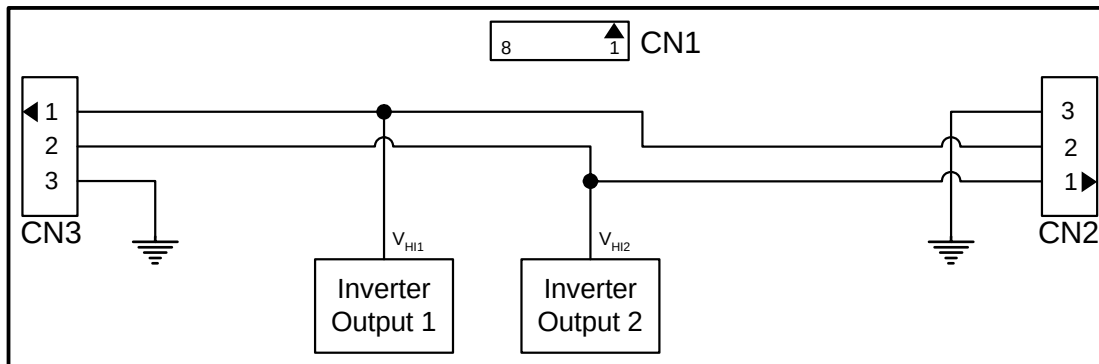
Our multi-output inverters are designed to keep your application operating at near normal brightness in the event that a lamp fails. This allows the display to remain “on-line” until lamp replacement is convenient.

Microsemi “pairs” the lamps so that if one lamp in the pair breaks, most of its current is added to the good lamp. CCFLs will respond with more brightness for a period of time. Operating time in this mode will be a function of the lamps age but should be typically in the order of hundreds of hours.

This operating characteristic can provide adequate display performance for a limited, but useful period of time. Shortening of the lamp life in this mode is typically not a concern as it is recommended that all lamps in a display be replaced at the same time.



**Figure 1 – Dual Output Stage**

**CONNECTOR SCHEMATIC**

**Figure 2 – LXMG1620-01 Connector Schematic**
**Connectors:**

CN1 = MOLEX 53261-0871

CN2, CN3 = JST SM03(4.0)B-BHS-1-TB(LF)(SN)  
Or  
Yeon Ho 20015WR-07A00

**Mates With:**

Pins: 50079-8100\*, Housing: 51021-0800  
\*Loose (-8000, Chain) Recommended #26 AWG wiring

JST BHR-03VS-1

**Connections Rules**

1. Always install two (2) lamps. Operating with only one lamp may overdrive lamp current at maximum brightness settings.
2. Verify lamp wiring before connecting lamps to the inverter module. Connecting both lamps to one of the two inverter output circuits will result in reduced brightness. The LXMG1620-01 module connectors are wired per industry standard. The lamp hot wires (high voltage wires) are always on pin 1 or 2, and the cold wire (low voltage wire) is always on pin 3.

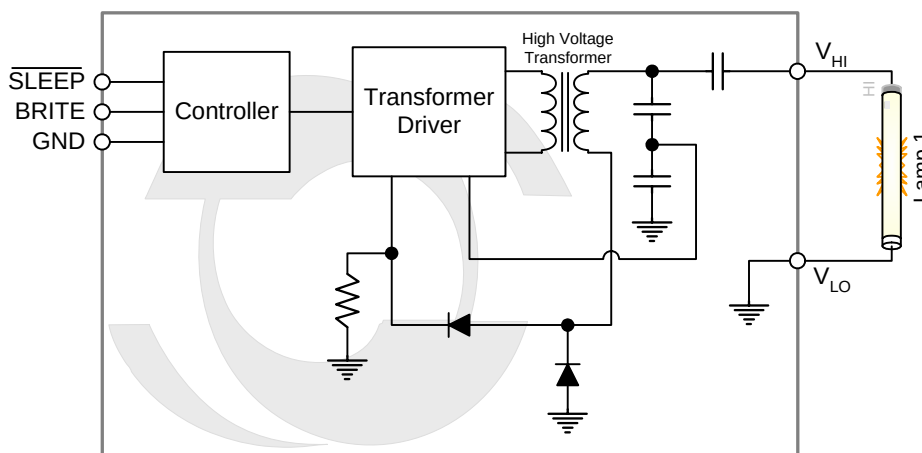
### DIRECT DRIVE OUTPUT ARCHITECTURE

Direct Drive architecture includes two load feedback control loops to provide uncompromised CCFL ignition and operation characteristics.

Lamp current is regulated in the CCFL return lead (ISNS loop) to insure constant light output with changing lamp parameters and power supply voltage. This also allows accurate and repeatable brightness control. Dimming ratio with the LXMG1620 analog dimming inverters is typically 6:1 when driving dual LCD lamp panels.

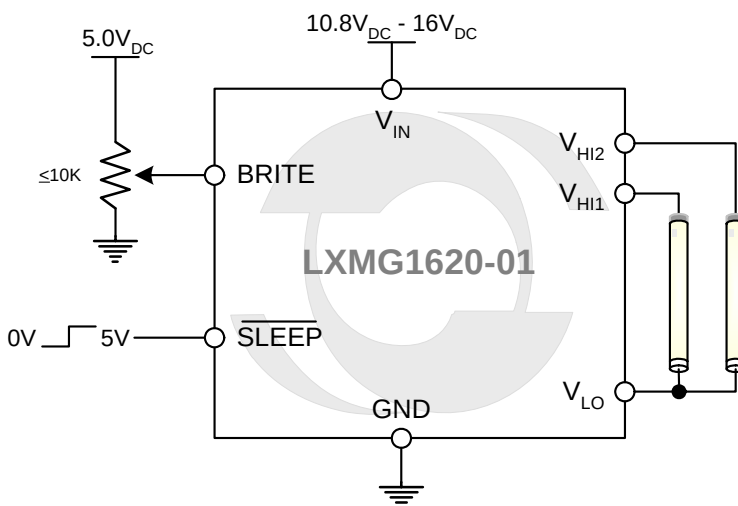
If no current flows in the CCFL return path because of an unstruck or failed lamp, the inverter applies full strike voltage potential. The output voltage feedback loop (VSNS) takes control and regulates output voltage to 1650VRMS. This insures the lamp will ignite under worst case temperatures and aging conditions.

Because output voltage is actively regulated, it will never exceed component and panel insulation ratings. This prevents destructive corona discharge to insure long term reliability of the system.



**Figure 3 – LXMG1620 Block Diagram  
(Only One Lamp Shown)**

### TYPICAL APPLICATION



**Figure 4 – Typical Application**



Not Recommended For New Design

LXMG1620-01

Direct Drive Dual Lamp CCLF Inverter Module

NOT RECOMMENDED FOR NEW DESIGN  
SEE LXMG1624-12-61

## NOTES

PRODUCTION DATA – Information contained in this document is proprietary to Microsemi and is current as of publication date. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.