

阅读申明

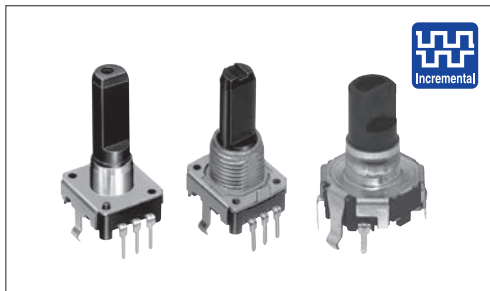
- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".



Typical Specifications



Items		Specifications
Rating		0.5mA 5V DC
Operating life	Without detent	15,000 cycles 30,000 cycles (Lightest (jog))
	With detent	30,000 cycles
Operating temperature range		EC12E: -10°C to +70°C EC12D: -40°C to +85°C

Product Line

Standard type

Length of the shaft LM ₁ (mm)	Detent torque (mN·m)	Number of detent	Number of pulse	Operating direction	Minimum order unit (pcs.)		Product No.	Drawing No.		
					Japan	Export				
15	Standard 3 to 20	12	12	Vertical	2,400	2,400	EC12E1220407	2		
20							EC12E1220406	1		
25							EC12E1220405			
8.5 (Hollow shaft)	Lightest (jog) 3±2				3,000	3,000	EC12E1220301	3		
20					2,400	2,400	EC12E1240405		1	
25					EC12E1240406					
8.5 (Hollow shaft)		3,000	3,000		EC12E1240301	3				
15	Standard 3 to 20	24	24		2,400	2,400	EC12E24204A2	2		
17.5							EC12E24204A7	1		
20							EC12E24204A8			
25							EC12E24204A9			
8.5 (Hollow shaft)					3,000	3,000	EC12E2420301	3		
20	Lightest (jog) 3±2				2,400	2,400	EC12E24404A8	1		
25					EC12E24404A6					
8.5 (Hollow shaft)					3,000	3,000	EC12E2440301	3		
20	Lightest (jog)10 max.				Without		2,400	2,400	EC12E24104A6	1
25	Standard 25±15								EC12E2430404	
		EC12E2430401								

With Bushing Type

Length of the shaft LM ₁ (mm)	Detent torque (mN·m)	Number of detent	Number of pulse	Operating direction	Minimum order unit (pcs.)		Product No.	Drawing No.
					Japan	Export		
25	Standard 3 to 20	12	12	Vertical	1,900	1,900	EC12E1220813	4
20		24	24				EC12E2420802	
25							EC12E2420801	
30							EC12E2420803	
20	Standard 25±15	Without					EC12E2430804	
25							EC12E2430803	
30							EC12E2460802	
	Heavy 40±15							

Note

Nuts and washers are not included. If required, please contact us.

Refer to P.290 for product varieties.
Refer to P.290 for switches.
Refer to P.307 for soldering conditions.

Product Line

With Switch Type

Length of the shaft LM ₁ (mm)	Detent torque (mN·m)	Number of detent	Number of pulse	Operating direction	Operating force of switch (N)	Travel of push-on switch (mm)	Minimum order unit (pcs.)		Product No.	Drawing No.
							Japan	Export		
17.5	5±3	30	15	Vertical	3	0.5	1,280	2,560	EC12D1524403	5
	10±5				EC12D1564402					
	5±3				EC12D1524406					
	10±5				EC12D1564404					

Notes

EC12D is suitable for automotive use.

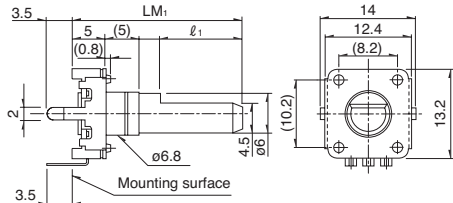

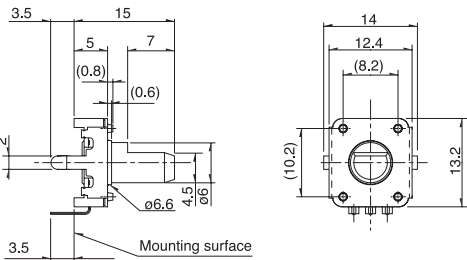

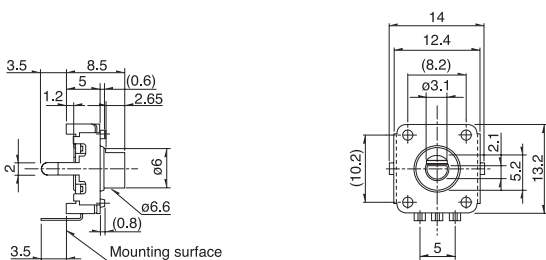

Packing Specifications

Tray

Product No.	Number of packages (pcs.)		Export package measurements (mm)
	1 case / Japan	1 case / export packing	
EC12E □□□ 03	3,000	3,000	369×525×204
EC12E □□□ 04	2,400	2,400	
EC12E □□□ 08	1,900	1,900	
EC12D	1,280	2,560	360×540×290

Dimensions

Unit:mm

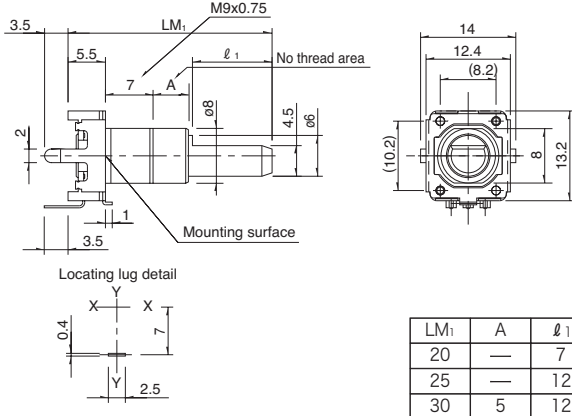

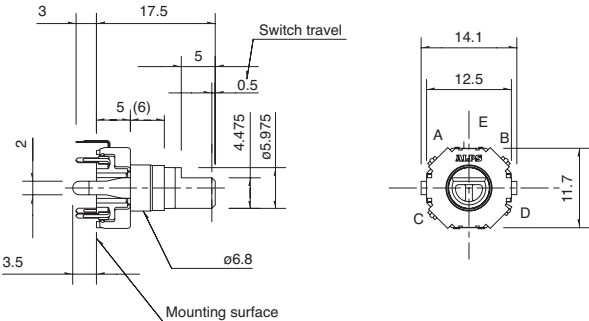

No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)								
1		 <table data-bbox="979 1339 1102 1431"><tr><th>LM₁</th><th>ℓ₁</th></tr><tr><td>17.5</td><td>5</td></tr><tr><td>20</td><td>7</td></tr><tr><td>25</td><td>12</td></tr></table>	LM ₁	ℓ ₁	17.5	5	20	7	25	12	
LM ₁	ℓ ₁										
17.5	5										
20	7										
25	12										
2											
3											

Refer to P.290 for product varieties.



Refer to P.290 for switches.

Refer to P.307 for soldering conditions.



Dimensions

		Unit:mm													
No.	Photo	Style	PC board mounting hole dimensions (Viewed from mounting side)												
4	With bushing type 	 <table data-bbox="920 649 1104 750"><tr><th>LM₁</th><th>A</th><th>ℓ₁</th></tr><tr><td>20</td><td>—</td><td>7</td></tr><tr><td>25</td><td>—</td><td>12</td></tr><tr><td>30</td><td>5</td><td>12</td></tr></table>	LM ₁	A	ℓ ₁	20	—	7	25	—	12	30	5	12	
LM ₁	A	ℓ ₁													
20	—	7													
25	—	12													
30	5	12													
5	With push-on switch type  														

Output Wave

EC12E  Detent stability position (When the switch is provided) CW direction → ※Detent position cannot be specified for B signal.	EC12D  Detent stability position CW direction →
--	--

Sliding Noise

Test circuit  Measurement condition : Rotation speed 360°/s	Output waveform  t : Masking time to avoid chattering	EC12E $V_1 = V_2 = 1.5V$ max. At $R = 10k\Omega$ Chattering : 3ms max. Bounce : 2ms max. EC12D $V_1 = V_2 = 2.5V$ max. At $R = 5k\Omega$ Chattering : 3ms max. Bounce : 2ms max.
---	---	---


12mm Size Insulated Shaft Type/Product Varieties

■ Shaft Dimensions

Flat Type

Unit:mm

High collar type

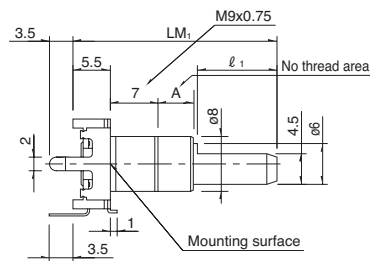


Detailed dimensions

	LM ₁	ℓ ₁
※	17.5	5
	20	7
※	22.5	7
	25	12
	30	12

※ Not available for types without detents

With bushing type



Detailed dimensions

LM ₁	A	ℓ ₁
20	—	7
25	—	12
30	5	12
35	5	12


Excluding the 12 detent type

12mm Size Insulated Shaft Type / Switch Specifications

Switch type		Momentary push switch
Contact arrangement		Single pole and single throw (Push-on)
Travel (mm)		0.5±0.3
Operating force		3 ± ^{1.5} / ₁ N, 6 ± ^{2.5} / ₂ N
Operating life		30,000 times
Electrical performance	Rating	1 mA 5V DC (10mA 5V DC max. ratings)
	Contact resistance	100mΩ max. for initial period, 200mΩ max. after operating life.
	Insulation resistance	100MΩ min. 250V DC
	Voltage proof	300V AC for 1 minute or 360V AC for 1s

Encoders

List of Varieties

Type		Insulated shaft			Hollow shaft			
		12mm size		18mm size	5mm size		10mm size	
Series		EC12E	EC12D	EC18A	EC05E		EC10E	
Photo								
Output		Incremental (Two phase A and B)			Absolute type			
Shaft types		Single-shaft			Hollow shaft			
Operating direction		Vertical			Vertical	Horizontal	Horizontal	
Number of pulse / Number of detent		12 / 12 24 / 24 24 / Without	15 / 30	12 positions 16 positions	12 / 12		12 / 24 12 / 12	
Features		—	With push-on switch	Water resisting performance (IPX7)	Surface mount type		—	
Dimensions (mm)	W	12.4	12.5	18.8	5.7	7.5	9.8	
	D	13.2	11.7	18	6	3.3	4.4	
	H	5			8.75	2.7	7.25	10.6 / 12.6 / 14.6
Operating temperature range		−10℃ to +70℃	−40℃ to +85℃	−20℃ to +60℃	−30℃ to +85℃		−5℃ to +45℃ −30℃ to +85℃ (For Automotive)	
Operating life		15,000 cycles 30,000 cycles	30,000 cycles			100,000 cycles		
Automotive use		—		—	—			
Life cycle (availability)								
Electrical performance	Rating	0.5mA 5V DC	1mA 5V DC	1mA 10V DC	0.55mA 5.5V DC		1mA 5V DC	
	Max./min. operating current (Resistive load)	5mA / 0.5mA	10mA / 1mA	—	0.55mA / —		—	
	Insulation resistance	10MΩ min. 50V DC	100MΩ min. 250V DC	10MΩ min. 250V DC	50MΩ min. 50V DC			
	Voltage proof	50V AC for 1 minute	300V AC for 1 minute or 360V AC for 1s	50V AC for 1 minute or 60V AC for 2s	50V AC for 1 minute			
Mechanical performance	Rotational torque (Without detent)	10mN·m max. 25±15mN·m 40±15mN·m	—	—	—		—	
	Detent torque	3±2mN·m 3 to 20mN·m	5±3mN·m 10±5mN·m	60±20mN·m	1.6±1.3mN·m		5±3mN·m 6±3mN·m	
	Push-pull strength	80N	100N	Push 100N / pull 50N	—			
Shaft configuration		Flat, Hollow Shaft	Flat			Hollow shaft		
Terminal type		Insertion			Reflow		Insertion	
Switch Specifications	Switch type	—	Push-on switch		—	—		
	Contact arrangement	—	Single pole and single throw (Push-on)		—	—		
	Travel (mm)	—	0.5±0.3		—	—		
	Operating force (N)	—	3 ^{+1.5} _{−1}	6 ^{+2.5} _{−2}	—	—		
	Rating	—	1mA 5V DC (10mA 5V DC max. ratings)		—	—		
	Contact resistance	—	100mΩ max. for initial period; 200mΩ max. after operating life.		—	—		
	Operating life	—	30,000 times		—	—		
Page		287			291		293	295

Encoders Soldering Conditions	307
Encoders Cautions	308

Notes

- The operating temperature range for automotive applications can be raised upon request. Please contact us for details.
- Indicates applicability to all products in the series, while ○ indicates applicability to some products in the series.

Reference for Manual Soldering

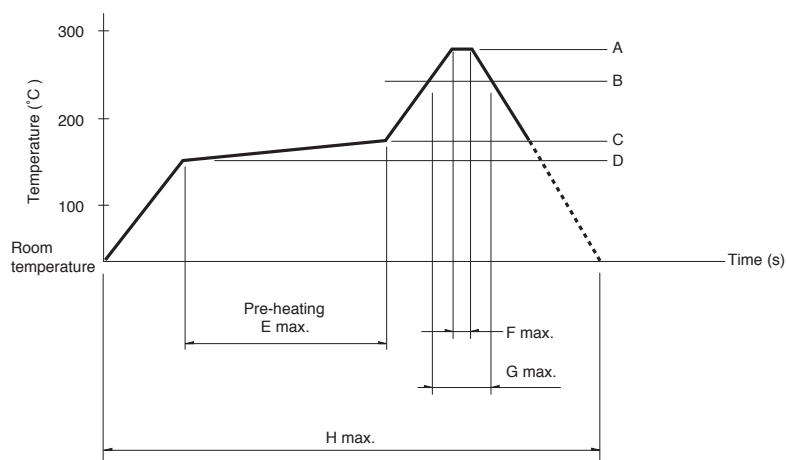
Series	Tip temperature	Soldering time	No. of solders
EC05E, EC09E, EC10E, EC111, EC11B, EC11E, EC11G, EC11K, EC12D, EC12E, EC18A, EC21A, EC28A, EC35A, EC35AH, EC35B, EC40A, EC45A, EC50A, EC60B, EM11B, EM20B, EC21C	350°C max.	3s max.	1 time
EC11J	350±10°C	3 ⁺¹ ₀ s	2 time

Reference for Dip Soldering

Series	Preheating		Dip soldering		No. of solders
	Soldering surface temperature	Heating time	Soldering temperature	Soldering time	
EC09E, EC11B, EC111, EC11E, EC11G, EC11K, EC18A, EC21A, EC28A, EC35A, EC35AH, EC35B, EC50A, EC60B	100°C max.	2 min. max.	260±5°C	5±1s	2 time max.
EC10E, EC12D, EC12E, EM11B	100°C max.	1 min. max.	260±5°C	3±1s	2 time max.
EC40A	110°C max.	1 min. max.	260°C max.	10s max.	1 time
EC45A	100°C max.	2 min. max.	260°C max.	5s max.	2 time max.
EM20B	80°C max.	1 min. max.	260°C max.	3s max.	2 time max.

Example of Reflow Soldering Condition

Temperature profile



Series	A	B	C	D	E	F	G	H	No. of reflows
EC11J	260°C	230°C	180°C	150°C	2 min. max.	3s	40s	4 min. max.	2 time max.
EC05E	250°C min.	230°C min.	180°C	150°C	60s to 120s	—	30s to 40s	—	2 time max.
EC21C	230°C to 245°C	220°C	200°C	150°C	60s to 120s	—	25s to 60s	300 max.	1 time max.

注記

- When using an infrared reflow oven, solder may sometimes not be applied. Be sure to use a hot air reflow oven or a type that uses infrared rays in combination with hot air.
- The temperatures given above are the maximum temperatures at the terminals of the encoder when employing a hot air reflow method. The temperature of the PC board and the surface temperature of the encoder may vary greatly depending on the PC board material, its size and thickness. Ensure that the surface temperature of the encoder does not rise to 250°C or greater.
- Conditions vary to some extent depending on the type of reflow bath used. Be sure to give due consideration to this prior to use.