

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

2 Way-0° 50Ω

800 to 2700 MHz



BLUE CELL™

CASE STYLE: FV1206-1
 PRICE: \$2.50 ea. QTY (10-49)
 \$.99 ea. QTY (100)

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	20W* max.

*derate linearly to 6W at 100°C ambient.

Pin Connections

SUM PORT	2
PORT 1	6
PORT 2	4
GROUND	1,3,5
PORT 1-2	resistor external 100 OHMS

Outline Drawing

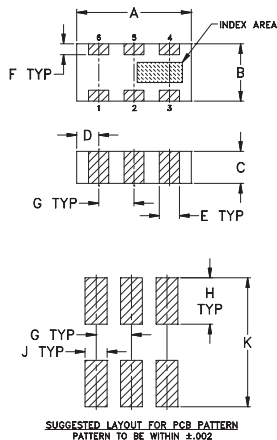


TOLERANCE UNLESS OTHERWISE STATED

2 PLACE DECIMALS: ±.01
 3 PLACE DECIMALS: ±.005

Outline Dimensions (inch)

A	B	C	D	E	F	G
.126	.063	.035	.024	.022	.012	.039
3.20	1.60	0.89	0.61	0.56	0.30	0.99
H	J	K	wt.			
.042	.024	.123	grams			
1.07	0.61	3.12	.020			

Demo Board MCL P/N: TB-252
 Suggested PCB Layout (PL-129)

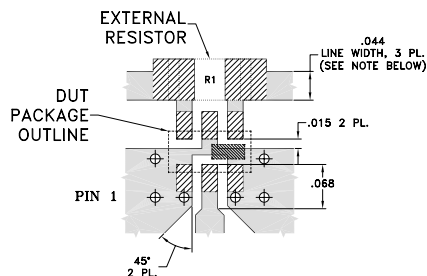

NOTE:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- LOCATION OF PTH'S DESIGNATED ACCORDING TO ARTWORK OF TEST BOARD B14-TB-252 (CONTACT MINI-CIRCUITS).
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Features

- isolation resistor, external 100 ohms
- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- very good phase unbalance, 1.0 deg. typ.
- high isolation, 22 dB typ.
- excellent power handling, 20W as splitter
- small size, 0.12"X0.06"X0.035"
- ESD non-sensitive
- temperature stable, BLUE CELL™ technology
- wrap around, solder plated terminations for excellent solderability
- low cost
- patent pending





Applications

- PCS, DECT
- WLAN
- GSM, GPS
- ISM applications

Splitter Electrical Specifications

MODEL NO.	FREQUENCY (MHz)	INSERTION LOSS (dB)		ISOLATION (dB)	PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)		
		ABOVE 3.0 dB							INPUT	OUTPUT	
		Typ.	Max.		Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.
SCN-2-11	800-1175 875-1125	0.5	0.8	20 22	15 18	1.0 1.0	3.0 3.0	0.1 0.1	0.3 0.3	16 16	18 20
		0.5	0.8								
SCN-2-15	1100-1450 1200-1375	0.5	0.8	23 25	17 20	1.5 1.5	3.0 3.0	0.25 0.2	0.4 0.3	15 16	17.5 18
		0.4	0.7								
SCN-2-19	1425-1900 1550-1800	0.5	0.9	23 25	17 20	2.5 2.0	4.0 4.0	0.25 0.2	0.4 0.4	15 19	18 18
		0.5	0.9								
SCN-2-22	1850-2200 1900-2100	0.5	0.9	22 24	17 20	2.0 2.0	5.0 5.0	0.25 0.2	0.4 0.4	16 16	19 19
		0.5	0.9								
SCN-2-27	2225-2700 2325-2600	0.5	1.1	21 23	17 20	3.5 2.5	6.0 6.0	0.6 0.4	0.8 0.7	19 20	17 17
		0.4	1.0								

Performance Charts

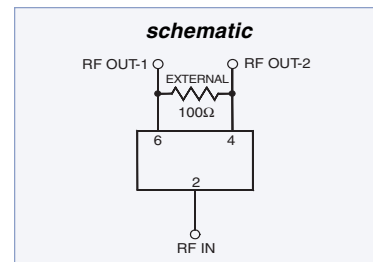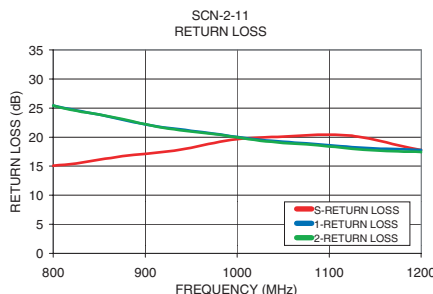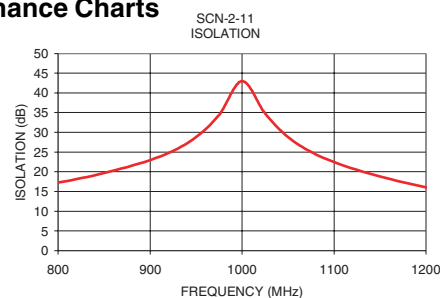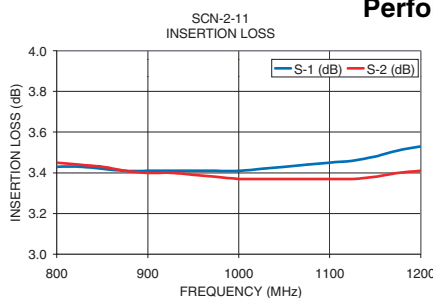

Performance Charts

