

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

APPLICATIONS

- ✓ Laptop Computers
- ✓ Cellular Phones
- ✓ Digital Cameras
- ✓ Personal Digital Assistant (PDA)

IEC COMPATIBILITY (EN61000-4)

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 μ s - Level 2(Line-Gnd) & Level 3(Line-Line)

FEATURES

- ✓ Unidirectional: 500 Watts Peak Pulse Power per Line ($t_p = 8/20\mu$ s)
- ✓ Bidirectional: 400 Watts Peak Pulse Power per Line ($t_p = 8/20\mu$ s)
- ✓ Unidirectional & Bidirectional Configurations
- ✓ Replacement for MLV (0805)
- ✓ Protects One Power or I/O Port
- ✓ ESD Protection > 40 kilovolts
- ✓ Low Clamping Voltage
- ✓ Available in Multiple Voltage Types Ranging from 3V to 36V
- ✓ RoHS Compliant


MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SOD-323 Package
- ✓ Weight 5 milligrams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating (Annealed)
- ✓ Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Device Marking: Marking Code & Polarity Band (*Unidirectional Only*)




PIN CONFIGURATIONS

UNIDIRECTIONAL



BIDIRECTIONAL



PSD03 thru PSD36C

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Unidirectional Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	500	Watts
Bidirectional Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	400	Watts
Operating Temperature	T_L	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER (See Notes 1-2)	DEVICE MARKING	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 1A$ V_c VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20 μs V_c @ I_{PP}	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_b μA	TYPICAL CAPACITANCE 0V @ 1 MHz C pF
PSD03	A	3.3	4.0	6.5	10.9V @ 43.0A	125	500
PSD03C	G	3.3	4.0	7.0	10.9V @ 39.0A	125	200
PSD05	B	5.0	6.0	9.8	13.5V @ 42.0A	10	350
PSD05C	H	5.0	6.0	9.8	14.5V @ 28.0A	10	175
PSD08	C	8.0	8.5	13.4	16.9V @ 34.0A	10	250
PSD08C	J	8.0	8.5	13.4	18.5V @ 17.0A	10	150
PSD12	D	12.0	13.3	19.0	25.9V @ 21.0A	1	150
PSD12C	K	12.0	13.3	19.0	29.5V @ 14.0A	1	50
PSD15	E	15.0	16.7	24.0	30.0V @ 17.0A	1	100
PSD15C	L	15.0	16.7	24.0	33.0V @ 12.0A	1	40
PSD18	G	18.0	20.0	29.0	40.0V @ 9.0A	1	90
PSD18C	N	18.0	20.0	29.0	40.0V @ 9.0A	1	40
PSD24	F	24.0	26.7	43.0	49.0V @ 12.0A	1	88
PSD24C	M	24.0	26.7	43.0	46.2V @ 9.0A	1	40
PSD36	R	36.0	40.0	60.0	75.0V @ 5.0A	1	75
PSD36C	T	36.0	40.0	60.0	75.0V @ 5.0A	1	35

Note 1: Part numbers with an additional "C" suffix are bidirectional devices, i.e., PSD05C.


Note 2: *Unidirectional Only:* Positive potential is applied from pin 2 to 1 or pin 3 to 4.

GRAPHS


**FIGURE 1
PEAK PULSE POWER VS PULSE TIME**

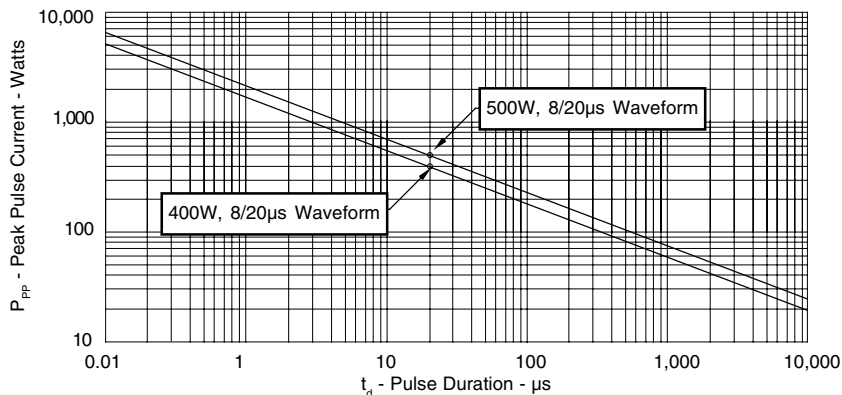


**FIGURE 2
PULSE WAVE FORM**

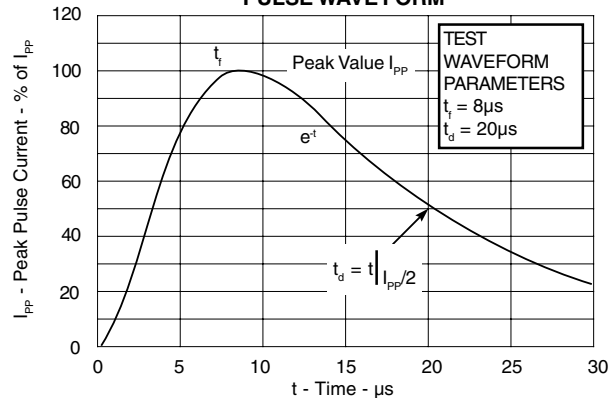


**FIGURE 3
POWER DERATING CURVE**

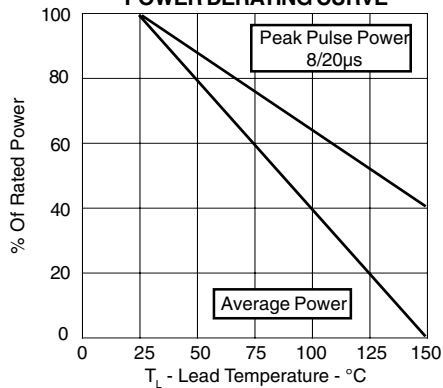

**FIGURE 4
OVERSHOOT & CLAMPING VOLTAGE FOR PSD03**


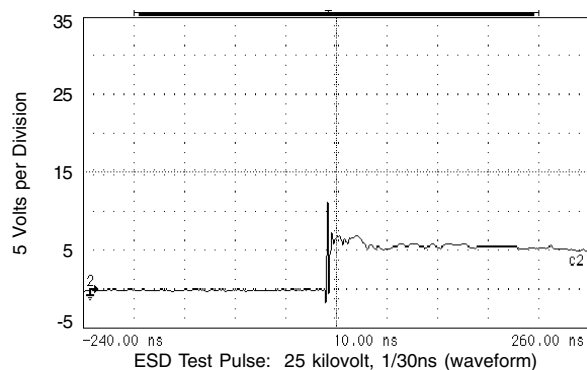


**FIGURE 5
TYPICAL REVERSE VOLTAGE VS CAPACITANCE FOR PSD05**

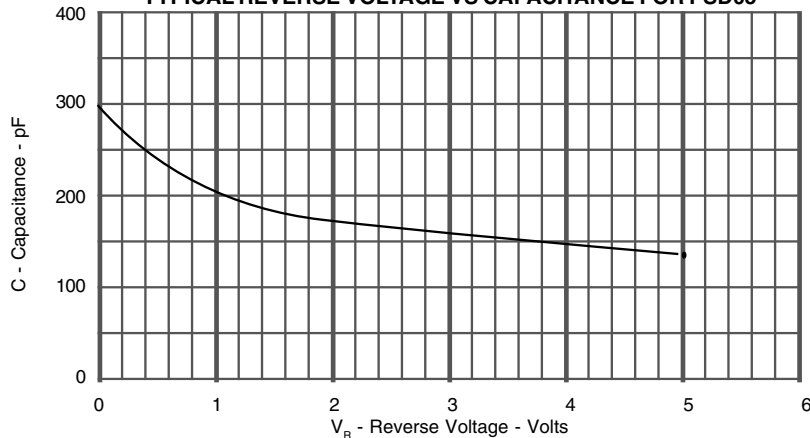


PSD03 thru PSD36C

SOD-323 PACKAGE OUTLINE & DIMENSIONS

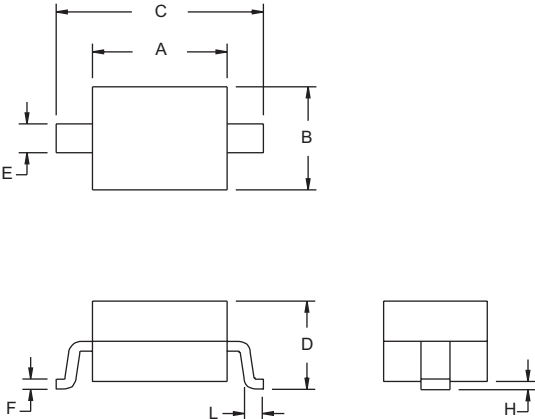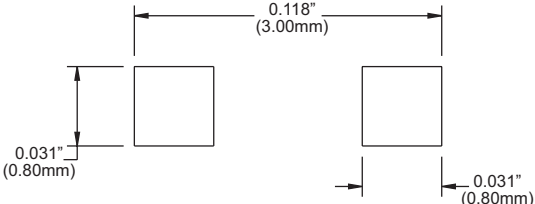PACKAGE OUTLINE 	SOD-323 PACKAGE  PACKAGE DIMENSIONS <table><thead><tr><th rowspan="2">DIM</th><th colspan="2">MILLIMETERS</th><th colspan="2">INCHES</th></tr><tr><th>MIN</th><th>MAX</th><th>MIN</th><th>MAX</th></tr></thead><tbody><tr><td>A</td><td>1.60</td><td>1.90</td><td>0.063</td><td>0.075</td></tr><tr><td>B</td><td>1.15</td><td>1.45</td><td>0.045</td><td>0.057</td></tr><tr><td>C</td><td>2.39</td><td>2.70</td><td>0.094</td><td>0.106</td></tr><tr><td>D</td><td>0.92</td><td>1.10</td><td>0.033</td><td>0.043</td></tr><tr><td>E</td><td>0.25</td><td>0.40</td><td>0.010</td><td>0.016</td></tr><tr><td>F</td><td>0.10</td><td>0.20</td><td>0.004</td><td>0.008</td></tr><tr><td>H</td><td>-</td><td>0.10</td><td>-</td><td>0.004</td></tr><tr><td>L</td><td>0.20</td><td>-</td><td>0.08</td><td>-</td></tr></tbody></table>	DIM	MILLIMETERS		INCHES		MIN	MAX	MIN	MAX	A	1.60	1.90	0.063	0.075	B	1.15	1.45	0.045	0.057	C	2.39	2.70	0.094	0.106	D	0.92	1.10	0.033	0.043	E	0.25	0.40	0.010	0.016	F	0.10	0.20	0.004	0.008	H	-	0.10	-	0.004	L	0.20	-	0.08	-
DIM	MILLIMETERS		INCHES																																															
	MIN	MAX	MIN	MAX																																														
A	1.60	1.90	0.063	0.075																																														
B	1.15	1.45	0.045	0.057																																														
C	2.39	2.70	0.094	0.106																																														
D	0.92	1.10	0.033	0.043																																														
E	0.25	0.40	0.010	0.016																																														
F	0.10	0.20	0.004	0.008																																														
H	-	0.10	-	0.004																																														
L	0.20	-	0.08	-																																														
MOUNTING PAD 	NOTES 1. Controlling Dimensions in Millimeters. 2. Dimensions are exclusive of mold flash and metal burrs. TAPE & REEL ORDERING NOMENCLATURE 1. Surface mount product is taped and reeled in accordance with EIA-481. 2. Suffix-T7 = 7 Inch Reel - 3,000 pieces per 8mm tape, i.e., <i>PSD05C-T7</i>. 3. Suffix -LF = Lead-Free, Pure-Tin Plating, i.e., <i>PSD05C-LF-T7</i>. Outline & Dimensions: Rev 2 - 9/05, 06010																																																	

Tape & Reel Specifications (Dimensions in millimeters)

Reel Dia.	Tape Width	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")	8mm	1.55 ± 0.10	2.90 ± 0.10	1.35 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

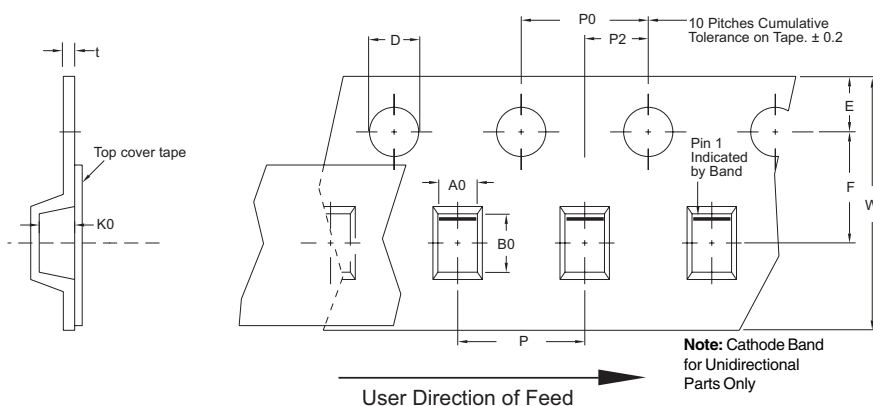

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: sales@protekdevices.com

Web Site: www.protekdevices.com