

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

Model 6180 series

7/8" Diameter

Single Turn

Conductive Plastic

Precision Potentiometer /

Position Sensor



MODEL STYLES AVAILABLE

6181	1/8" Shaft, 1/4" Bushing
6184	6 mm Shaft, 3/8" Bushing
6186	1/8" Shaft, 3/8" Bushing
6187	1/4" Shaft, 3/8" Bushing
6188 for side load applications	1/4" Shaft, 3/8" Bronze Bushing

ELECTRICAL¹

Resistance Range	1K to 100K Ohms
Standard Resistance Tolerance	±10%
Minimum Practical Resistance Tolerance	±5%
Independent Linearity ²	±1%
Minimum Practical Independent Linearity	±0.5%
Input Voltage	400 VDC maximum, not to exceed power rating
Power Rating	1.0 Watt at 70°C, derating to 0 at 125°C
Dielectric Strength	750 V rms
Insulation Resistance	1,000 Megohms minimum
Output smoothness	0.1% maximum
Actual Electrical Travel	340° nominal (300° with stop feature)
Electrical Continuity Travel	350° nominal (320° with stop feature)
End Voltage	maximum 0.5% of input voltage
Resolution	essentially infinite
Temperature Coefficient of Resistance ³	-400 ppm/°C typical
Temperature Coefficient of Output Voltage ⁴	±10 ppm/°C typical

MECHANICAL

Total Mechanical Travel	360° Continuous (320° ±3° with stop feature)
Number of Gangs	1 maximum
Weight	0.53 oz. nominal (single gang)
Backlash	1° maximum
Static Stop Strength	40 oz.-in.
Panel Nut Tightening Torque	25 lb.-in. maximum
Start/Run Torque	1.0 oz.-in.

¹ Specifications subject to change without notice.

² Linearity is measured between 1% and 99% of input voltage.

³ Special TCR available to ±100 ppm/°C.

⁴ Measured with 10 VDC CW to CCW and slider at 50% of electrical travel




Model 6180

ENVIRONMENTAL (MIL-PRF-39023)

Operating Temperature Range	-40°C to +125°C dynamic, -65°C to +125°C static
Temperature Cycling	5 cycles, -65°C to +125°C, maximum 10% ΔR
Shock	6 ms Saw-tooth, 100 G's, 0.1 ms maximum discontinuity
Vibration	10 G's, 10 to 500 Hz, maximum 2% ΔR, 0.1 ms maximum discontinuity
Moisture Resistance	five 24 hour cycles, maximum 25% ΔR
High Temperature Exposure	1,000 hours at 125°C, maximum 0.5% ΔV _R
Rotational Life	5 million shaft revolutions (no sideload, 6188 up to 8 oz sideload)
Rotational Load Life	5 million shaft revolutions, maximum 10% ΔR
Ingress Protection Rating (IP Code)	IP50, IP66 available as option (feature code ES)

ORDERING INFORMATION

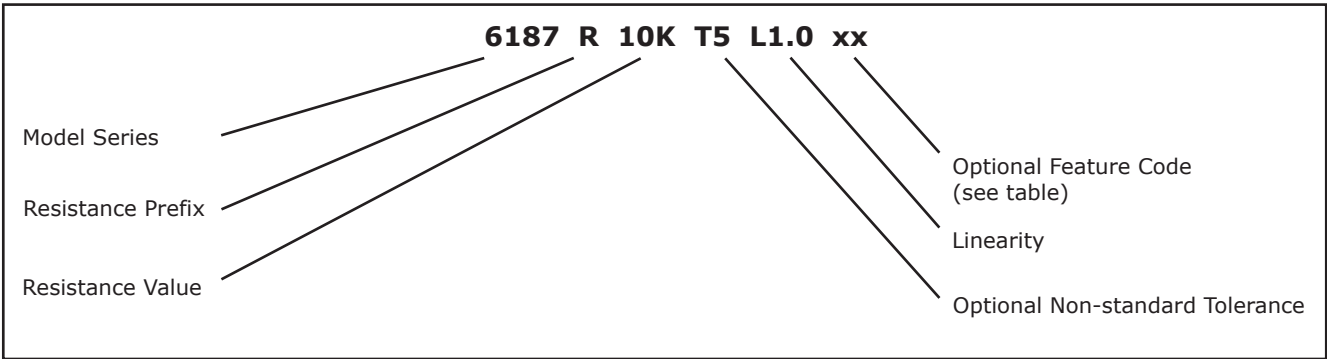


FEATURE CODES

Center Tap	CT
Linearity Tape	LT
Shaft Lock 6187 only	SL
Stop	ST
Seal (IP66) 6184, 6187, or 6188 only	ES

When multiple feature codes are used the P/N shall be in the same sequence as listed in this table (top to bottom).

CIRCUIT DIAGRAM

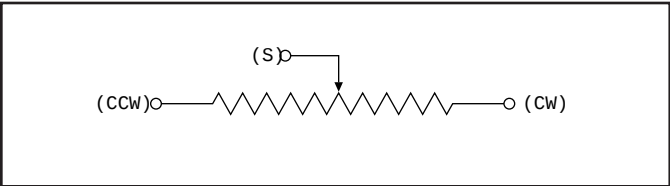


STANDARD RESISTANCE VALUES

1K	2K	5K	10K	20K	50K
----	----	----	-----	-----	-----


Model 6180

OUTLINE DRAWING

Model 6181

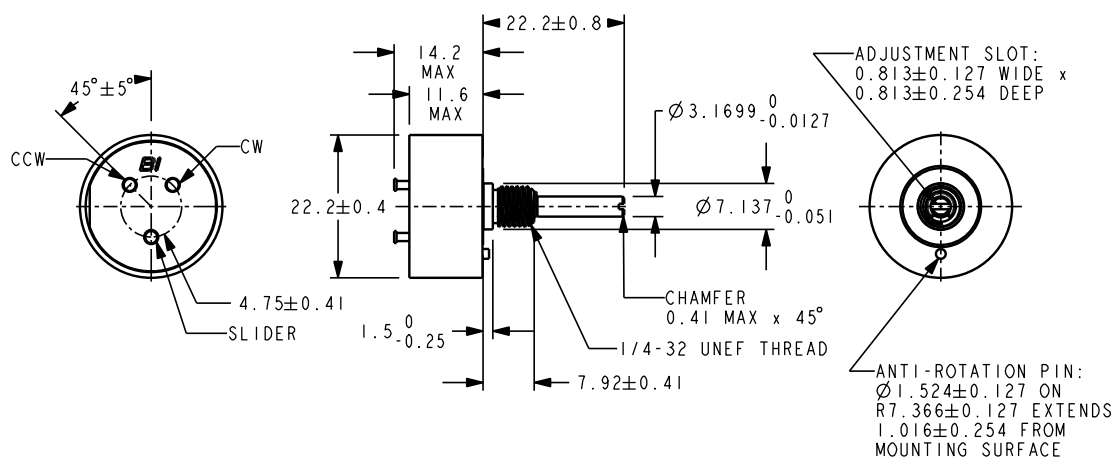

Models 6184, 6186, and 6187

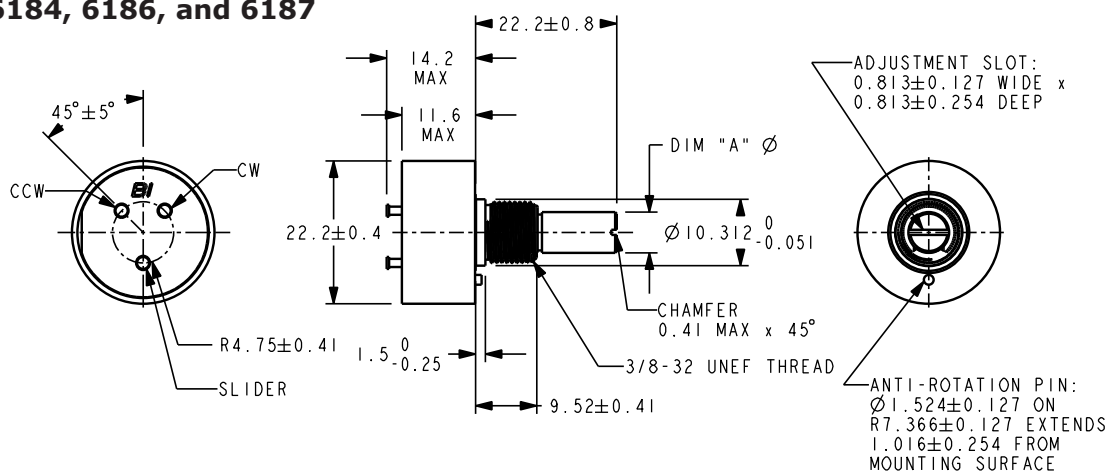

DIM	MODEL 6184	MODEL 6186	MODEL 6187
A	6.0 +0.0000 -0.0127	3.1699 +0.0000 -0.0127	6.3424 +0.0000 -0.0127

Dimensions in mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

[6187R10KL1.0](#) [6187R20KL1.0](#) [6187R5KL1.0](#) [6187R1KL1.0](#) [6187R2KL1.0](#) [6187R50KL1.0](#) [6187R10KL1.0LF](#)
[6187R5KL1.0LF](#) [6187R5KL1.0ST](#) [6187R10KL.5](#) [6187R2KL1.0LF](#) [6187R100KL1.0LF](#) [6187R20KL1.0LF](#)
[6187R50KL1.0LF](#) [6187R1KL1.0LF](#)