

阅读申明

- 1.本站收集的数据手册和产品资料都来自互联网，版权归原作者所有。如读者和版权方有任何异议请及时告之，我们将妥善解决。
- 2.本站提供的中文数据手册是英文数据手册的中文翻译，其目的是协助用户阅读，该译文无法自动跟随原稿更新，同时也可能存在翻译上的不当。建议读者以英文原稿为参考以便获得更精准的信息。
- 3.本站提供的产品资料，来自厂商的技术支持或者使用者的心得体会等，其内容可能存在描述上的差异，建议读者做出适当判断。
- 4.如需与我们联系，请发邮件到marketing@iczoom.com，主题请标有“数据手册”字样。

Read Statement

1. The datasheets and other product information on the site are all from network reference or other public materials, and the copyright belongs to the original author and original published source. If readers and copyright owners have any objections, please contact us and we will deal with it in a timely manner.
2. The Chinese datasheets provided on the website is a Chinese translation of the English datasheets. Its purpose is for reader's learning exchange only and do not involve commercial purposes. The translation cannot be automatically updated with the original manuscript, and there may also be improper translations. Readers are advised to use the English manuscript as a reference for more accurate information.
3. All product information provided on the website refer to solutions from manufacturers' technical support or users the contents may have differences in description, and readers are advised to take the original article as the standard.
4. If you have any questions, please contact us at marketing@iczoom.com and mark the subject with "Datasheets".

MPLAB® ICD 2 In-Circuit Debugger/Programmer


In-Circuit Debugging Basics

Traditionally, embedded systems engineers use in-circuit emulators (ICE) to develop and debug their designs and then programmers to transfer the code to the devices. The in-circuit debugging logic, when implemented, is part of the actual microcontroller silicon and provides a low-cost alternative to a more expensive ICE. In-circuit debugging offers these benefits:

- Low cost
- Minimum of extra hardware
- Expensive sockets or adapters are not needed
- Debugging and programming a production line board is possible

However, it has the following trade-offs:

- Use of some target system resources such as I/O pins, program memory, data memory, and stack space. As a result, some portions of an embedded application may not be debugged.
- Triggering and breakpointing are limited to the built-in capabilities of the in-circuit debugging logic.
- The target chip must be running with a clock and a supply voltage. Often an emulator probe can run without external hardware.

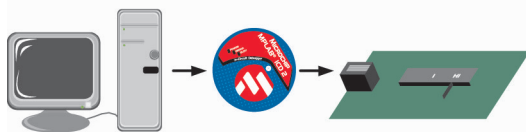


All-in-one Debugger/Programmer Solution for Flash Products

The MPLAB ICD 2 (In-Circuit Debugger 2) allows debugging and programming of PIC® and dsPIC® Flash microcontrollers using the powerful graphical user interface of the MPLAB Integrated Development Environment (IDE), included with each kit. The MPLAB ICD 2 is connected to the design engineer's PC using USB or RS-232 interface and can be connected to the target via an ICD connector. The connector uses two device I/O pins that are shared between in-circuit debugging and In-Circuit Serial Programming™.

Host System Requirements

- PC-compatible system with a Intel Pentium® class or higher processor, or equivalent
- A minimum of 32 MB RAM
- A minimum of 40 MB available hard drive space
- CD-ROM drive (for use with the accompanying CD)
- Available USB or RS-232 port
- Microsoft® Windows® 98, Windows NT® 4.0, Windows 2000 or Windows XP USB support may be limited by the Windows operating system, particularly Windows 98/NT.

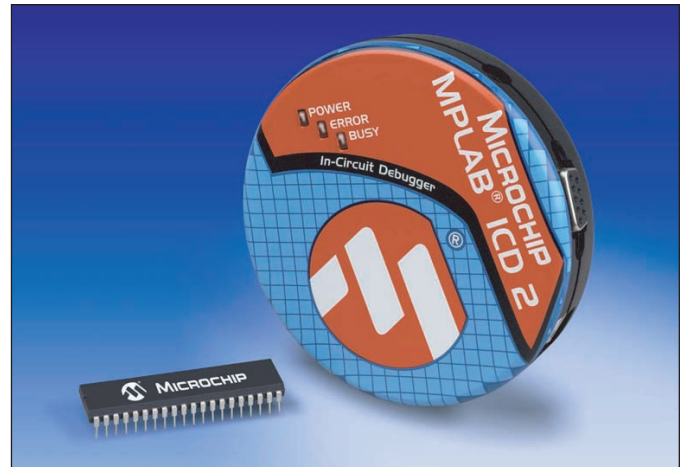

Features


- USB (Full Speed 2 Mbits/s) and RS-232 interface to host PC
- Real-time execution
- MPLAB IDE compatible (free copy included)
- Built-in over voltage/short circuit monitor
- Firmware upgradeable from PC/web download
- Totally enclosed
- Supports low voltage to 2.0 volts (2.0 to 6.0 range)
- Diagnostic LED's (Power, Busy, Error)
- Read/Write program and data memory of microcontroller
- Erase of program memory space with verification
- Freeze-peripherals at breakpoint

Products Supported

The MPLAB ICD 2 currently supports most PIC and dsPIC Flash microcontrollers. Flash PICmicro MCU's not supported are PIC16F72/73/74/76/77/83/84A.


The MPLAB ICD 2 firmware is continually being updated to add support for new devices. A review of the README file located in MPLAB IDE is recommended for the most current list of supported parts. As new device firmware becomes available, free downloads are available at www.microchip.com.

Universal Programming Module



The Universal Programming Module can be used in conjunction with the MPLAB ICD 2 to provide an easy means for programming 300 to 600-mil PDIP Flash devices. It features a 40-pin ZIP socket, an MPLAB ICD 2 connector, programming indicator and configuration jumpers.

MPLAB ICD 2 Headers



For 8-pin (PIC12F629/675), 14-pin (PIC16F630/676) or 18-pin (PIC16F627A/628A/648A) devices, limited I/O make integrated in-circuit debugging impractical. Instead, in-circuit debugging is made possible by using a header containing an equivalent device with integrated in-circuit debugging peripheral. For debugging, the header is connected

to the MPLAB ICD 2 module via the MPLAB ICD 2 connector and is inserted into the target socket with a stand-off connector.

Part Numbers and Ordering Information – MPLAB® ICD 2 Products and Accessories

Part Number	Description	Availability
DV164005	ICD 2 Module (Includes ICD 2 Module and USB Cable)	Now
DV164006	ICD 2 Evaluation Kit (Includes ICD 2 Module, USB Cable, RS-232 Cable, Power Supply and PICDEM™ 2 Plus Demonstration Board - DV163022)	Now
DV164007	ICD 2 Module ws (Includes ICD 2 Module, USB Cable, RS-232 Cable and Power Supply)	Now
AC162049	Universal Programming Module Works with DV164005, DV164006 and DV164007 above)	Now
AC162048	RS-232 and Power Supply Kit (Use with DV164005 above for RS-232 communication)	Now
DM163022	PICDEM 2 Plus Demonstration Board (Includes PIC18F452, PIC16F877, LCD 2 x 16 Display, LED's, RS-232 Port, Piezo Sounder, Temperature Sensor, Demonstration Programs, Unassembled Source Code and More)	Now
AC162050	Header Interface (8P DIP) for PIC12F629/675	Now
AC162051	Header Interface (28P/40P DIP)	Now
AC162052	Header Interface (14P DIP) for PIC16F676/630	Now
AC162053	Header Interface (18P DIP) for PIC16F627A/628A/648A	Now
AC162054	Header Interface (18P DIP) for PIC16F716	Q1/04

Customer Support

Microchip maintains a worldwide network of distributors, representatives, local sales offices, Field Application Engineers and Corporate Application Engineers. Microchip's Internet home page can be reached at: www.microchip.com.

Americas	Asia/Pacific	Europe
Atlanta (770) 640-0034	Australia 61-2-9868-6733	Austria 43-7242-2244-399
Boston (978) 692-3848	China – Beijing 86-10-85282100	Denmark 45-4420-9895
Chicago (630) 285-0071	China – Chengdu 86-28-86766200	France 33-1-69-53-63-20
Dallas (972) 818-7423	China – Fuzhou 86-591-7503506	Germany 49-89-627-144-0
Detroit (248) 538-2250	China – Hong Kong SAR 852-2401-1200	Italy 39-0331-742611
Kokomo (765) 864-8360	China – Qingdao 86-532-5027355	Netherlands 31-416-690399
Los Angeles (949) 263-1888	China – Shanghai 86-21-6275-5700	United Kingdom 44-118-921-5869
Phoenix (480) 792-7966	China – Shenzhen 86-755-82901380	
San Jose (408) 436-7950	China – Shunde 86-765-8395507	As of 9/1/03
Toronto (905) 673-0699	India 91-80-2290061	
	Japan 81-45-471- 6166	
	Korea 82-2-554-7200	
	Singapore 65-6334-8870	
	Taiwan 886-2-2717-7175	
	Taiwan – Kaohsiung 886-7-536-4818	

Microchip Technology Inc. • 2355 W. Chandler Blvd. • Chandler, AZ 85224-6199 USA • (480) 792-7200 • FAX (480) 792-7277

The Microchip name and logo, the Microchip logo, dsPIC, KEELoQ, MPLAB, PIC, PICmicro, PICSTART, PRO MATE and PowerSmart are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. FilterLab, microID, MXDEV, MXLAB, PICMASTER, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A. Accuron, Application Maestro, dsPICDEM, dsPICDEM.net, ECAN, ECONOMONITOR, FanSense, FlexROM, fuzzyLAB, In-Circuit Serial Programming, ICSP, ICEPIC, microPort, Migratable Memory, MPASM, MPLIB, MPLINK, MPSIM, PICC, PICkit, PICDEM, PICDEM.net, PowerCal, PowerInfo, PowerMate, PowerTool, rLAB, rPIC, Select Mode, SmartSensor, SmartShunt, SmartTel and Total Endurance are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. Serialized Quick Turn Programming (SQTP) is a service mark of Microchip Technology Incorporated in the U.S.A. All other trademarks mentioned herein are property of their respective companies.

© 2003, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved. 9/03

DS51264B

